

# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

SPECint<sup>®</sup>2006 = 77.0

PRIMERGY TX1320 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECint\_base2006 = 74.6

CPU2006 license: 19


Test date: Mar-2017

Test sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Nov-2016

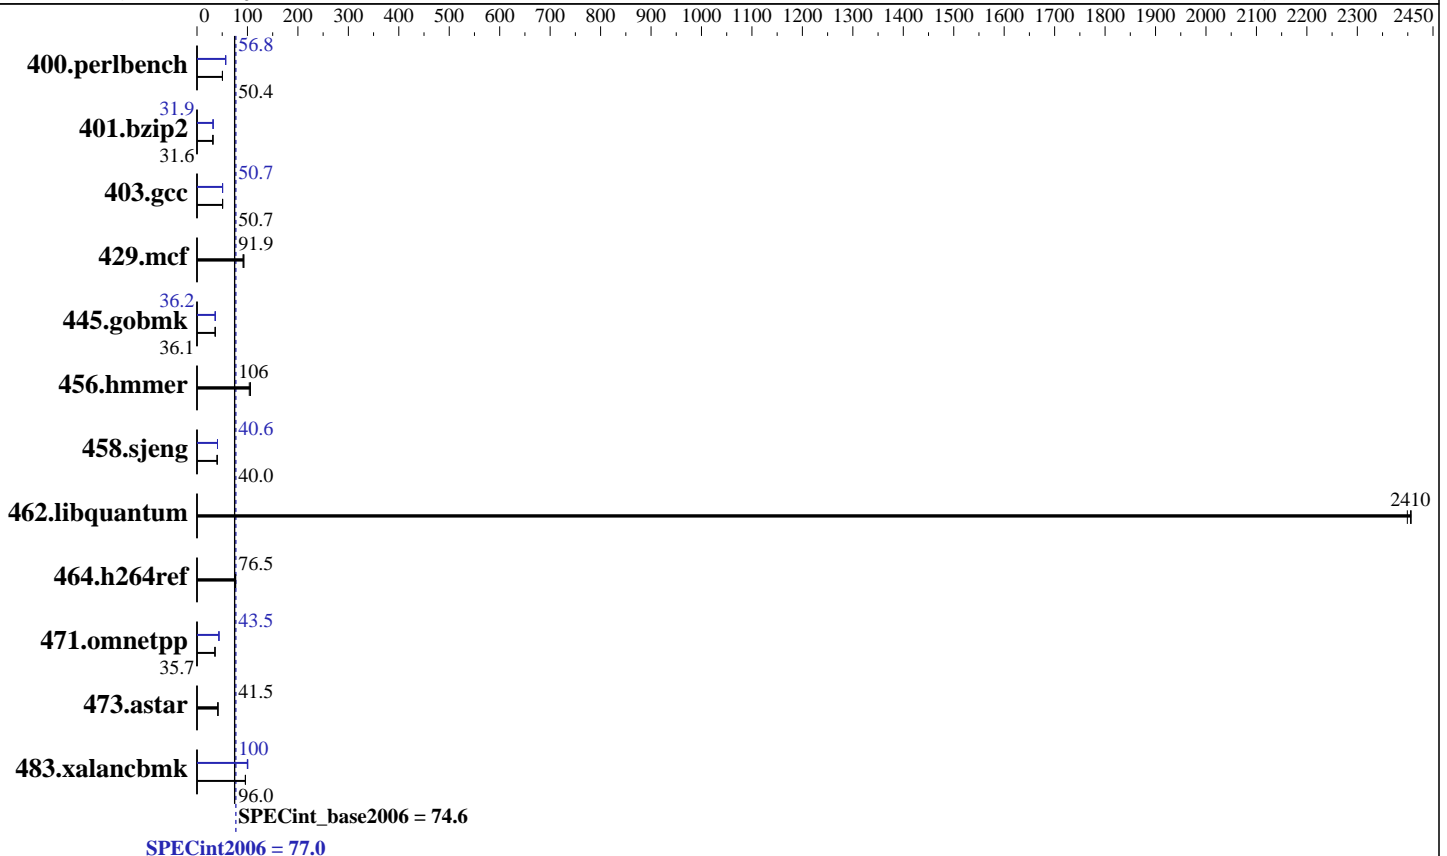

### Hardware

CPU Name: Intel Xeon E3-1280 v6  
CPU Characteristics: Intel Turbo Boost Technology up to 4.20 GHz  
CPU MHz: 3900  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)  
Disk Subsystem: 1 x 1TB, SATA III, 7200 RPM  
Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64) 4.4.21-68-default  
Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.2

# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 77.0

PRIMERGY TX1320 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECint\_base2006 = 74.6

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Mar-2017  
Hardware Availability: May-2017  
Software Availability: Nov-2016

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	193	50.5	<b>194</b>	<b>50.4</b>	194	50.4	172	56.8	<b>172</b>	<b>56.8</b>	172	56.9
401.bzip2	307	31.5	305	31.6	<b>306</b>	<b>31.6</b>	303	31.9	<b>302</b>	<b>31.9</b>	302	32.0
403.gcc	158	50.8	<b>159</b>	<b>50.7</b>	159	50.6	159	50.7	159	50.8	<b>159</b>	<b>50.7</b>
429.mcf	<b>99.2</b>	<b>91.9</b>	99.8	91.4	97.9	93.1	<b>99.2</b>	<b>91.9</b>	99.8	91.4	97.9	93.1
445.gobmk	290	36.2	290	36.1	<b>290</b>	<b>36.1</b>	<b>290</b>	<b>36.2</b>	290	36.2	290	36.1
456.hammer	90.0	104	<b>88.2</b>	<b>106</b>	88.1	106	90.0	104	<b>88.2</b>	<b>106</b>	88.1	106
458.sjeng	302	40.0	302	40.0	<b>302</b>	<b>40.0</b>	298	40.6	<b>298</b>	<b>40.6</b>	298	40.6
462.libquantum	<b>8.61</b>	<b>2410</b>	8.61	2410	8.64	2400	<b>8.61</b>	<b>2410</b>	8.61	2410	8.64	2400
464.h264ref	290	76.4	289	76.5	<b>289</b>	<b>76.5</b>	290	76.4	289	76.5	<b>289</b>	<b>76.5</b>
471.omnetpp	175	35.7	176	35.6	<b>175</b>	<b>35.7</b>	144	43.5	<b>144</b>	<b>43.5</b>	144	43.5
473.astar	169	41.6	170	41.3	<b>169</b>	<b>41.5</b>	169	41.6	170	41.3	<b>169</b>	<b>41.5</b>
483.xalancbmk	71.9	95.9	<b>71.9</b>	<b>96.0</b>	71.8	96.0	69.2	99.7	<b>68.9</b>	<b>100</b>	68.5	101

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"  
Turbo mode set with :  
cpupower -c all frequency-set -g performance  
cpupower idle-set -d 2  
cpupower idle-set -d 3  
cpupower idle-set -d 4  
echo always > /sys/kernel/mm/transparent_hugepage/enabled  
KMP_AFFINITY = "granularity=fine,scatter"  
OMP_NUM_THREADS = "4"
```

## Platform Notes

BIOS Settings:  
Hyper-threading = Disabled  
Sysinfo program /home/benchmark/speccpu-20160922-updated/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-lrfj Sat Mar 4 23:07:20 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page

# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 77.0

PRIMERGY TX1320 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECint\_base2006 = 74.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2017

Hardware Availability: May-2017

Software Availability: Nov-2016

## Platform Notes (Continued)

model name : Intel(R) Xeon(R) CPU E3-1280 v6 @ 3.90GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

cache size : 8192 KB

From /proc/meminfo

MemTotal: 65834924 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 2

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION\_ID="12.2"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux linux-lrfj 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016  
(63cf368) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Mar 4 18:54

SPEC is set to: /home/benchmark/speccpu-20160922-updated

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda3 xfs 890G 8.3G 881G 1% /home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.0.0 for D3373-B1x  
02/20/2017

Memory:

Continued on next page

# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 77.0

PRIMERGY TX1320 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECint\_base2006 = 74.6

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Mar-2017  
Hardware Availability: May-2017  
Software Availability: Nov-2016

## Platform Notes (Continued)

4x Samsung M391A2K43BB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = \*/home/benchmark/speccpu-20160922-updated/libs/32:/home/benchmark/speccpu-20160922-updated/libs/64:/home/benchmark/speccpu-20160922-updated/sh10.2\*

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

This result was measured on the PRIMERGY TX1320 M3. The PRIMERGY TX1320 M3  
and the PRIMERGY TX1330 M3 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
-auto-p32

Continued on next page

# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 77.0

PRIMERGY TX1320 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECint\_base2006 = 74.6

CPU2006 license: 19

Test date: Mar-2017

Test sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Nov-2016

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
473.astar: icpc -m64
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
403.gcc: -DSPEC_CPU_LP64
```

```
429.mcf: -DSPEC_CPU_LP64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -DSPEC_CPU_LP64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 77.0

PRIMERGY TX1320 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECint\_base2006 = 74.6

CPU2006 license: 19

Test date: Mar-2017

Test sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Nov-2016

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div -auto-ilp32 -qopt-prefetch

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-qopt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2)

456.hmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-ra-region-strategy=block  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 77.0

PRIMERGY TX1320 M3, Intel Xeon E3-1280 v6, 3.9GHz

SPECint\_base2006 = 74.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2017

Hardware Availability: May-2017

Software Availability: Nov-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Mar 23 13:09:58 2017 by SPEC CPU2006 PS/PDF formatter v6401.