


DATA SHEET

FUJITSU Software BS2000 DAB V9.5 Disk Access Buffer

Issue January 2017

Pages 3

Sophisticated, scalable and self-adaptive caching technologies are fundamental for performant, self-optimizing E-Business applications with guaranteed response-times (Business Critical Computing). Caches accelerate the reading and writing of data by factors. They are applied in networks, servers and disk subsystems. FUJITSU Software BS2000 DAB is the BS2000 software for disk data caching in main memories.

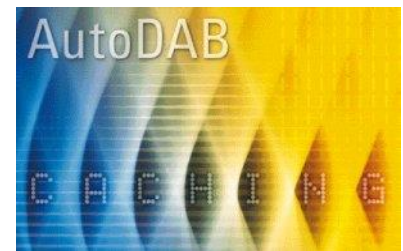

DAB (Disk Access Buffer)

- manages the caching of peripheral data on high-speed semiconductor memories. It caches data according to its temporary access profile. This results in significantly enhanced I/O performance and much quicker applications.
- buffers the data in intermediate storage (caching) with far shorter access times than those possible for external data storage (disk storage), even if the disk storage has its own cache. This considerably reduces the average I/O response time. I/O-intensive applications benefit in particular as their throughput and response times are significantly improved by DAB.
- supports main memories up to 2 TBytes and files up to 4 TBytes.
- supports file encryption.

The advantages of DAB are apparent in both sequential processing and in very localized random-access processing. DAB also provides write caching for significant performance gains in applications with high write rates.

Functional Description

To achieve appropriate performance gains, caching can be tuned to the data access behavior of the programs.

For this purpose, DAB offers three different caching modes and two different caching techniques, with considerable differences as to optimum usability, possible performance increases and data security:

- With the **read cache** only read accesses to the data areas served by DAB are buffered. On every read access, the data (including any relevant adjoining areas) is stored in the cache, if it has not already been stored. Subsequent read accesses to the same data can then be satisfied from the cache much more efficiently. This data stored in the cache is transferred directly to the user input area, i.e. without disk access. In the case of writing, a record is always transferred to the disk. If this record also exists in the cache area, it is updated there in parallel. This ensures that the current status is always stored both on the disk and in the cache, to ensure an efficient response to subsequent read accesses.
- With the **write cache** only write accesses to the data areas served by DAB are buffered. On such write accesses, the data to be written is first stored in a cache area. This data is saved at a later stage by DAB. If all available cache segments are occupied, the cache segment which has not been accessed for the longest time and whose data has been saved on the data medium is overwritten. In the case of read accesses, only the read hits are served by the DAB buffer, i.e. in the event of a read miss, no data is stored in the cache.
- With the **read/write cache** both the read and the write accesses to the data areas served by DAB are buffered. This function therefore represents a combination of the two functions detailed above.

DAB supports all caching modes in all storage media. However, it should be noted that in volatile cache media such as MM, the write cache data is lost in the event of a system crash. DAB operates with main memories up to 2 terabytes and files up to 4 terabytes.

The supported dialogue of Global Store operands is no longer visible. The command MODIFY-DAB-PARAMETERS is in the domain SYSTEM-TUNING no longer visible.

Changes were made in the coding because Global Store is no longer supported.

This is the last version to support USER-PFA caching. It will not be available in future versions.

Displacement algorithms

DAB has two displacement algorithms which can be set via parameter control; these are displacement according to LRU and resident buffering:

■ Displacement according to LRU

Here a DAB cache area is set up with a freely selectable, fixed size. If the size of the cache area is smaller than the sum of the disk areas to be supported, the cache area is managed according to the LRU (least recently used) algorithm. If there is insufficient space for storing new data, a check is done to see which data has not been used for the longest time. This data is then overwritten by the new data to be stored.

■ Resident buffering

With resident buffering, the data of the disk areas supported resides permanently in the cache medium and is not displaced. After initial cache tuning, this cache mode produces only hits, all I/Os are served from the cache. Resident buffering helps speed up critical user processes by avoiding physical input/output, regardless of the access location.

Recommendations for use

The system administrator simply selects the disks for caching, where the cacheable files are stored – DAB does the rest.

DAB dynamically calculates the current access profile for all the files on selected disks. A distinction is made between sequential processing, where large data areas are read in by DAB in advance for short periods (requiring only a small amount of cache storage), random access processing which is largely localized (e.g. transaction processing or database accesses), where only the data required by the application is read into the cache, and random access processing which is not localized, where caching has no positive effect on performance but uses cache storage. For this reason, DAB excludes such files from caching.

AutoDAB simplifies cache administration by allowing DAB to make the selection dynamically, automatically and self-optimising rather than the system administrator (or the user).

Benefits:

- best possible hit rate and therefore optimum I/O throughput,
- optimum cache utilization through automation,
- reduced system administration effort.

The new "Automatic Caching" functionality is offered for all files: Files on SF and SM pubsets as well as on private disks - on all disks in the form of ADM-PFA.

DAB extends the System Managed Storage concept (SMS). SMS is a concept for data and storage management, designed to make more efficient use of external storage resources.

TECHNICAL DETAILS

DAB V9.5

Technical data

Hardware

BS2000 Business Server

Memory requirements:

In addition to the main memory required by BS2000, memory is also required for administration tables in the cache areas. The size of the MM is dependent on the memory upgrade options of the relevant server and on the number and size of the disks and disk areas to be buffered.

Software

FUJITSU Software BS2000 OSD V11.0 or OSD/XC V11.0

Also recommended:

FUJITSU Software BS2000 openSM2 (for analyzing system utilization)

Operating mode

Interactive and batch mode

Implementation language

Assembler, SPL

User interface

Command interface for operator and system administrator

Installation

DSSM is used for installation.

Documentation

DAB User Guide

Training

See course offer at:

<http://ts.fujitsu.com/training>

Conditions

This software product can be purchased by the customer against a single payment or leased in accordance with the conditions for the use of software products.

Ordering and Delivery

This software product may be obtained from your local Fujitsu Technology Solutions GmbH regional office

More information

Fujitsu products, solutions & services

Products

<http://www.fujitsu.com/fts/products/>

In addition to BS2000, Fujitsu offers a full portfolio of other computing products:

- Storage systems: ETERNUS
- Server: PRIMERGY, PRIMEQUEST, Fujitsu SPARC M10, BS2000 Mainframe
- Client Computing Devices: LIFEBOOK, STYLISTIC, ESPRIMO, FUTRO, CELSIUS
- Peripherals: Fujitsu Displays, Accessories
- Software
- Network

Solutions

<http://www.fujitsu.com/fts/solutions>

Infrastructure Solutions are customer offerings created by bringing Fujitsu's products, services and technologies together with those from partners.

Industry Solutions are tailored to meet the needs of specific verticals.

Business and Technology Solutions provide a variety of technologies developed to tackle specific business issues such as security and sustainability, across many verticals.

Services

www.fujitsu.com/fts/services/

Application Services support the development, integration, testing, deployment and on-going management of both custom developed and packaged applications.

Business Services respond to the challenge of planning, delivering and operating IT in a complex and changing IT environment.

Managed Infrastructure Services enable customers to deliver the optimal IT environment to meet their needs.

More information

To learn more about BS2000, please contact your Fujitsu sales representative, Fujitsu business partner, or visit our website.

<http://www.fujitsu.com/fts/bs2000>

Fujitsu green policy innovation

www.fujitsu.com/global/about/environment/
Fujitsu Green Policy Innovation is our worldwide project for reducing burdens on the environment. Using our global know-how, we aim to resolve issues of environmental energy efficiency through IT.

Please find further information at:

www.fujitsu.com/global/about/environment/



Copyright

© 2014 Fujitsu Technology Solutions GmbH
Fujitsu and the Fujitsu logo are trademarks or registered trademarks of Fujitsu Limited in Japan and other countries. BS2000 is a trademark or a registered trademark of Fujitsu Technology Solutions GmbH in Germany and other countries. Other company, product and service names may be trademarks or registered trademarks of their respective owners.

Disclaimer

Technical data subject to modification and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

Contact

Fujitsu Technology Solutions GmbH
Mies-van-der-Rohe Straße 8
80807 München
Website: www.fujitsu.com/fts
17/01/2017 EN