

White paper

FUJITSU Software BS2000 VM2000 V11.5

Virtualization of BS2000 within the Dynamic Data Center.

Content	
Introduction	2
VM2000 as base for different system environments	2
Optimal use of resources with VM2000	3
Support of Live Migration	4
Further functional enhancements with VM2000 V11.5	4
Version overview	5
Summary of VM2000 benefits	5

Introduction

A virtual infrastructure like FUJITSU Software BS2000 VM2000 reduces IT costs by increasing efficiency, flexibility and response capability. It provides IT resource allocation on-the-fly in response to new business requirements and service requests. Extremely high levels of server utilization are a byproduct.

VM2000 supports the simultaneous operation of different, totally segregated system environments on one server. The operating resources (CPU power and main memory) of one real server can be distributed across up to 32 BS2000 guest systems. This distribution can be modified dynamically. The configuration of peripherals, including their connections (channels), and other devices can be modified or extended during live operation.

The advantage of using VM2000 as compared with the use of multiple servers is the possibility of consolidation with the aim of providing more efficient use of hardware resources, human resources and infrastructure.



VM2000 as base for different system environments

Customers are increasingly faced with the need to handle different system environments simultaneously on one server in order to cope most effectively with the wide variety of IT tasks they have to deal with.

The reasons are:

- Optimization of costs
- Simple and uniform handling and administration
- Parallel operation of production, development, test and version updates
- Automation and operational reliability
- Differentiated systems, for example for service data centers
- Availability of backup systems
- Separation of sensitive applications

VM2000 V11.5 is exclusively released for the FUJITSU Server BS2000 SE series and supports the current versions of the BS2000 operating system BS2000 OSD/BC as guest systems.

The provision of different system environments fulfills VM2000 in a flexible manner by the following features:

Simultaneous operation of many guest systems

On Server Unit x86 up to 32 BS2000 guest systems (incl. monitor system) can run simultaneously (on Server Unit /390 the number of guest systems is limited to 15).

Full separation of guest systems

Access to memory areas and devices of other guest systems is not possible. Faults in operation on one guest system do not affect the other guest systems, even if these errors cause the system to crash.

Flexible assignment of resources to the guest systems

Memory, devices, CPU power and global store can be assigned to guest systems "on the fly". The granularity of assignment is optimally small. The Capacity-on-Demand feature is offered: through connection of extra CPUs on the fly, CPU power can be increased for a certain time.

Increased reliability and availability

When the guest system (or the monitor system) fails, it can be automatically restarted. A manual restart of the monitor system can also be initiated. This does not affect the remaining guest systems.

When one CPU fails, VM2000 automatically activates the available spare CPU (on servers unit /390), system performance remains unchanged. The same applies to possible affected guest systems: a virtual spare CPU will be switched on – the guest system performance remains the same. With this technique, the availability of mono guest systems is equal to the availability level of multiprocessor guest systems.

BS2000 guest systems have the same functionality as systems in native mode

The instruction set, network communication options as well as test and diagnostic utilities of all guest systems running under VM2000 correspond to operation without VM2000.

Performance of guest systems is comparable with native mode

The guest systems access the CPUs directly, with only minor emulation required.

The memory is assigned permanently to the guest system and necessary address conversion is done by hardware.

The guest systems execute the IO's normally directly.

Simple system operation and configuration

Important guest systems can be prioritized, thus enabling a flexible response to customer requirements.

The management of I/O peripherals can be done VM2000 spanning: the reconfiguration and the dynamic expansion of peripheral objects is done in common for all guest systems from the monitor system.

Optimal use of resources with VM2000

VM2000 allows data center service providers to install one or a small number of high-performance servers that can run several operating systems for a variety of external customers.

This enables detailed capacity planning throughout the organization. Obvious knock-on effects of this include cost savings in relation to operating staff and space requirements for computers. The virtualization of resources such as CPU, main memory and global storage guarantees a high level of efficiency and optimum use of resources.

The billing of the consumed CPU power can be done in two different ways:

- Usage based
VM2000 writes VM-specific accounting records. They show the consumed CPU and the time periods of resource assignment.
- Service level agreements
the customer is guaranteed a certain CPU power, for which a RPF-based constant pricing is determined. The amount of CPU power used can be limited using the VM2000 function MAX-CPU-UTILIZATION.

Formation of CPU pools

CPUs can be combined dynamically CPU pools. For such a pool VMs can be determined, which only can use this pool. The CPUs and VMs of the pool form a part of the Server Unit, which is provided to a customer.

Dedicated CPUs

If the number of connected real CPUs in a CPU pool is greater or equal to the sum of connected virtual CPUs, then VM2000 assigns each virtual CPU of a VM one real CPU.


The solid CPU assignment is optimal for a sufficient number of real CPUs in terms of performance, because each virtual CPU is always running on one and the same real CPU.

Limitation of the CPU power for a group of guest systems

Multiple VMs on a Server Unit /390 can be combined into a VM group for which CPU scheduling specifications (CPU-Quota and MAX-CPU-UTILIZATION) can be effected comprehensive. The first step is to determine which CPU performance and CPU power limitation receives the VM group. In the second step, the power distribution within the VM group is determined. VM2000 provides for priority allocation of the group planned CPU power within the group. Service data centers can thus organize guaranteed computing performance for customers with multiple VMs.

Granularity setting of CPU-QUOTA and MAX-CPU-UTILIZATION

The two attributes for controlling the VM's performance can be specified with two decimal places. This means that for very big Server Units definitions are possible in the one-digit RPF area up to one percent of the CPU capacity.

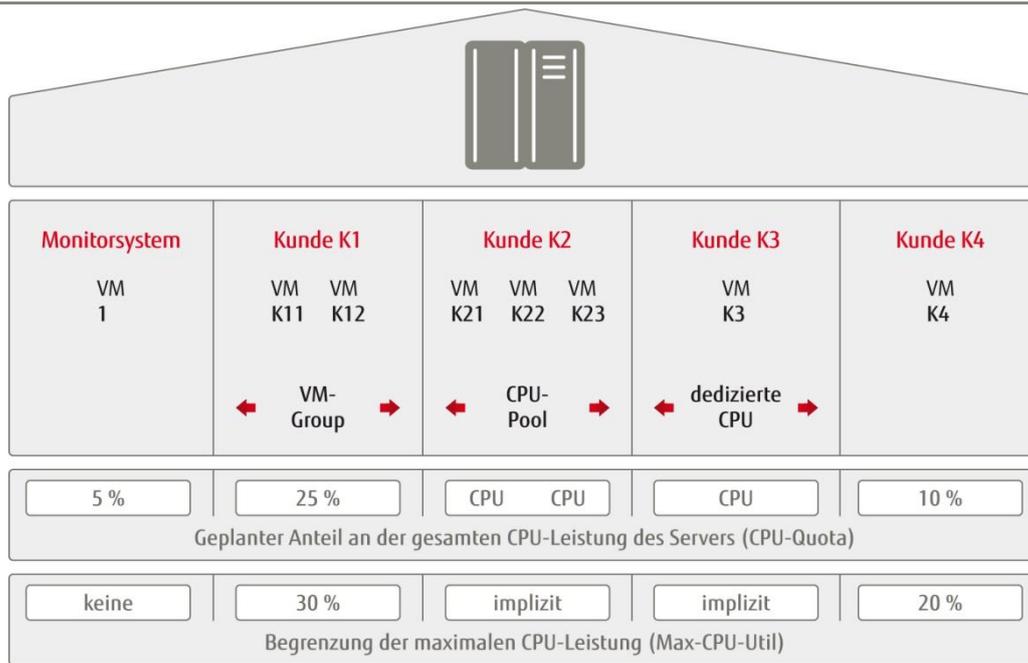

Operation of several guest systems under VM2000 on Server Unit /390

Support of Live Migration

Live Migration provides on SE servers an uninterruptable relocation of a running BS2000 guest system from one Server Unit to another. This enables a simple relocation of the guest systems with running applications to another server, for example prior to planned maintenance work respectively updates for hardware or firmware, including the reverse relocation of the systems or changing the load distribution between two servers. Those take place without affecting the users.

With the new VM2000 command MIGRATE-VM a virtual machine (BS2000-VM) can be relocated from the local Server Unit to another Server Unit (target SU) of the same SU cluster in a running guest system operation while maintaining the operating resources.

The Live Migration of a BS2000-VM between two Server Units /390 in SE network is fully executed by VM2000. The target SU is still located in another SE server. The LM functionality of Xen/X2000 in SU x86 is encased by VM2000 commands and messages. During VM migration of an SU x86 the target SU can be located in the same or a different SE server.

In addition to the Live Migration of BS2000-VM (VM status RUNNING or INIT-ONLY/DOWN) VM2000 V11.5 supports also the migration of a VM definition (VM status DEFINED-ONLY) between two Server Units of a SU cluster using the command MIGRATE-VM-DEFINITION.

The command CHECK-VM-INTEGRATION can check if a Live Migration of a VM is currently feasible.

In addition to VM2000 V11.5 the Live Migration functionality requires SE V6.2 (M2000, X2000, HNC) and ONETSERV V4.0 on all guest systems.

Further functional enhancements with VM2000 V11.5

Besides Live Migration the following new features are released with VM2000 V11.5:

Support of VM recovery

With the new command RECOVER-VM-DEFINITION a VM definition of a shutdowned or failed Server Unit of the same SU cluster can be adopted. Subsequently, the VM definition can be activated on the local Server Unit and the BS2000 guest system can be booted. The command is currently supported on SU / 390.

Update of VM2000 disk configuration

Service technicians can perform configuration changes in a disk storage system during operation. The new command CHECK-VM-DISK-CONFIGURATION starts an update of VM2000 disk configuration, in order to implement appropriate configuration changes.

The virtual machine system FUJITSU Software BS2000 VM2000 V11.5 exclusively supports the SE servers. On S and SQ servers VM2000 V11.5 has not been released.

Version overview**Server models supported by VM2000:**

BS2000 Server	VM2000			number of possible VMs
	V10.0	V11.0	V11.5	
S175	x	-	-	15
S210	x	-	-	15
SQ210	x	-	-	15
SE300, SU300	x*	x	x	32
SE300B, SU300B	-	x	x	32
SE310	-	-	x	32
SU /390 in SE700	x*	x	x	15
SU /390 in SE700B	-	x	x	15
SU /390 in SE710	-	-	x	15

* in VM2000 V10.0 the new functions for the SE servers are not available

Version of operating systems supported by VM2000 V11.0

VM2000 version	Server	Firmware	Monitor system (OSD/XC- or OSD/BC version)	Guest systems (OSD/XC- or OSD/BC version)
V11.5	SE310 SE710	SE-SW V6.3	V11.0B	V10.0, V11.0B
	SE300(B) SE500(B) SE700(B)	ab SE-SW V6.2	V11.0	V10.0, V11.0
V11.0	SE300(B) SE500(B) SE700(B)	ab SE-SW V6.2	V10.0, V11.0	V9.5, V10.0, V11.0
V10.0	SE300 SE500 SE700	SE-SW V6.2	V9.5, V10.0	V9.5, V10.0
	S175/S210	-	V9.0, V10.0, V11.0	V9.0, V10.0, V11.0
	SQ210	X2000 ab V5.3	V9.0, V10.0	V9.0, V10.0

Summary of VM2000 benefits

- Parallel operation of several BS2000 systems, respectively on Server Unit x86 also Linux/Windows systems on one server
- Support for version upgrades of the operating system, system-specific software and application systems
- More flexible resource distribution than is possible on multi-server configurations
- Provision of backup systems
- Price advantages compared to several servers (consolidation)
- Minimization of planned downtimes by uninterruptable relocation of running BS2000 guest systems

Contact:

Fujitsu
Barbara Stadler
Mies-van-der-Rohe-Str. 8, 80807 Munich
Germany
Email: Barbara.stadler@ts.fujitsu.com
Web site: de.fujitsu.com
September 30, 2019 EM EN

Copyright © 2019 Fujitsu Technology Solutions GmbH

Fujitsu and the Fujitsu Logo are trademarks or registered trademarks of Fujitsu Limited in Japan and in other countries. Other company, product or service names can be trademarks or registered trademarks of the respective owner.

Delivery subject to availability; right of technical modifications reserved. No liability or warranty assumed for completeness, validity and accuracy of the specified data and illustrations.

All designations used may be trademarks and/or copyrights, use of these by third parties for their own purposes could violate the rights of the respective owners.