

FUJITSU Storage ETERNUS AB/HB Series

Express Configuration

For VMware®

Contents

Deciding whether to use this Express Guide.....	3
Understand the workflow.....	5
Verify the VMware configuration is supported.....	6
Configure IP addresses using DHCP.....	7
Configure the multipath software.....	8
Access SANtricity System Manager and use the Setup wizard.....	9
Perform FC-specific tasks.....	11
Configuring the FC switches - VMware.....	11
Determining the host port WWPNS—FC.....	11
FC worksheet for VMware.....	11
Perform NVMe over FC-specific tasks.....	13
Configuring the NVMe/FC switches.....	13
Determine the host ports WWPNS - NVMe/FC VMware.....	13
Enable HBA Driver.....	13
NVMe/FC worksheet for VMware.....	14
Perform iSCSI-specific tasks.....	16
Configuring the switches - iSCSI, VMware.....	16
Configuring networking - iSCSI VMware.....	16
Configuring array-side networking - iSCSI, VMware.....	16
Configuring host-side networking—iSCSI.....	18
Verifying IP network connections - iSCSI, VMware.....	19
Recording iSCSI-specific information for VMware.....	19
iSCSI worksheet - VMware.....	20
Perform SAS-specific tasks.....	21
Determining SAS host identifiers - VMware.....	21
Recording SAS-specific information for VMware.....	21
SAS worksheet - VMware.....	21
Discover storage on the host.....	23
Configure storage on the host.....	24
Verify storage access on the host.....	25
Where to find additional information.....	26
Copyright and trademark.....	27
Copyright.....	27
Trademark.....	27
How to send comments about documentation and receive update notifications.....	28

Deciding whether to use this Express Guide

The "express method" for installing your storage system and accessing SANtricity System Manager is appropriate for setting up a standalone VMware host to an ETERNUS AB/HB Series storage system. It is designed to get the storage system up and running as quickly as possible with minimal decision points.

Note: The configuration that the express method provides might not meet the needs of your production environment.

The express method includes the following steps:

1. Setting up one of the following communication environments:

- NVMe over Fibre Channel
- Fibre Channel (FC)
- iSCSI
- SAS

2. Creating logical volumes on the storage system.

3. Making the volumes available to the data host.

This guide is based on the following assumptions:

Table 1:

Component	Assumptions
Hardware	<ul style="list-style-type: none">• You have used the Installation and Setup Instructions included with the controller shelves to install the hardware.• You have connected cables between the optional drive shelves and the controllers.• You have applied power to the storage system.• You have installed all other hardware (for example, management station, switches) and made the necessary connections.
Host	<ul style="list-style-type: none">• You have made a connection between the storage system and the data host.• You have installed the host operating system.• You are not using VMware as a virtualized guest.• You are not configuring the data (I/O attached) host to boot from SAN.
Storage management station	<ul style="list-style-type: none">• You are using a 1 Gbps or faster management network.• You are using a separate station for management rather than the data (I/O attached) host.• You are using out-of-band management, in which a storage management station sends commands to the storage system through the Ethernet connections to the controller.• You have attached the management station to the same subnet as the storage management ports.
IP addressing	<ul style="list-style-type: none">• You have installed and configured a DHCP server.• You have not yet made an Ethernet connection between the management station and the storage system.
Storage provisioning	<ul style="list-style-type: none">• You will not use shared volumes.• You will create pools rather than volume groups.

Component	Assumptions
Protocol: FC	<ul style="list-style-type: none"> You have made all host-side FC connections and activated switch zoning. You are using Fujitsu-supported FC HBAs and switches. You are using FC HBA driver and firmware versions as listed in the Server Support Matrix. Please contact Fujitsu support personnel for the Server Support Matrix.
Protocol: NVMe over Fibre Channel	<ul style="list-style-type: none"> You have made all host-side FC connections and activated switch zoning. You are using Fujitsu-supported FC HBAs and switches. You are using FC HBA driver and firmware versions as listed in the Server Support Matrix. Please contact Fujitsu support personnel for the Server Support Matrix.
Protocol: iSCSI	<ul style="list-style-type: none"> You are using Ethernet switches capable of transporting iSCSI traffic.
Protocol: SAS	<ul style="list-style-type: none"> You are using Fujitsu-supported SAS HBAs. You are using SAS HBA driver and firmware versions as listed in the Server Support Matrix. Please contact Fujitsu support personnel for the Server Support Matrix.


Related information

Server Support Matrix

[Express Configuration For Windows®](#)

Understand the workflow

This workflow guides you through the "express method" for configuring your storage system and SANtricity System Manager to make storage available to a host.

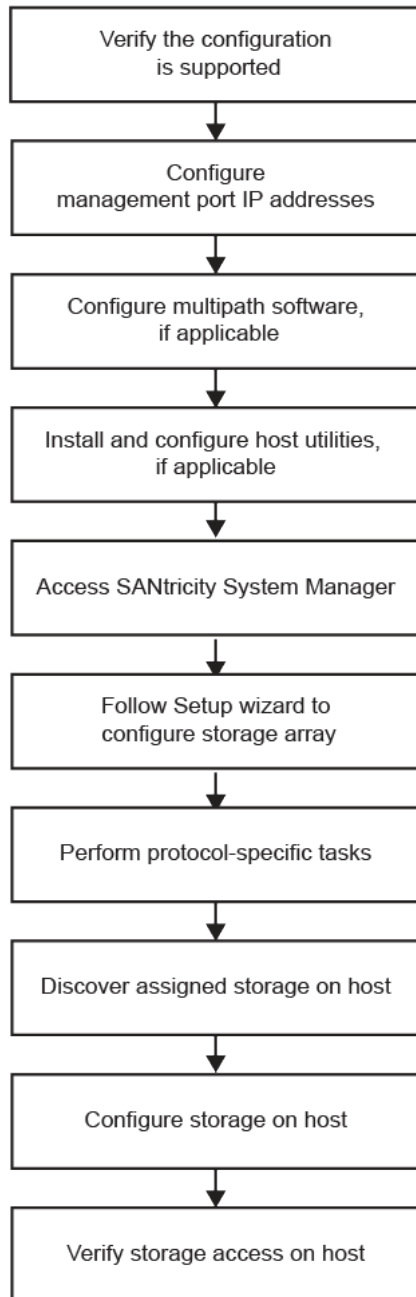

Verify the VMware configuration is supported

To ensure reliable operation, you create an implementation plan and then use the Server Support Matrix to verify that the entire configuration is supported. Please contact Fujitsu support personnel for the Server Support Matrix

Related information

Server Support Matrix

Configure IP addresses using DHCP

In this express method for configuring communications between the management station and the storage system, you use Dynamic Host Configuration Protocol (DHCP) to provide IP addresses. Each storage system has either one controller (simplex) or two controllers (duplex), and each controller has two storage management ports. Each management port will be assigned an IP address.

Before you begin

You have installed and configured a DHCP server on the same subnet as the storage management ports.

About this task

The following instructions refer to a storage system with two controllers (a duplex configuration).

1. If you have not already done so, connect an Ethernet cable to the management station and to management port 1 on each controller (A and B).

The DHCP server assigns an IP address to port 1 of each controller.

Note: Do not use management port 2 on either controller. Port 2 is reserved for use by Fujitsu support personnel.

Important: If you disconnect and reconnect the Ethernet cable, or if the storage system is power-cycled, DHCP assigns IP addresses again. This process occurs until static IP addresses are configured. It is recommended that you avoid disconnecting the cable or power-cycling the array.

If the storage system cannot get DHCP-assigned IP addresses within 30 seconds, the following default IP addresses are set:

- Controller A, port 1: 169.254.128.101
 - Controller B, port 1: 169.254.128.102
 - Subnet mask: 255.255.0.0
2. Locate the MAC address label on the back of each controller, and then provide your network administrator with the MAC address for port 1 of each controller.

Your network administrator needs the MAC addresses to determine the IP address for each controller. You will need the IP addresses to connect to your storage system through your browser.

Configure the multipath software

Multipath software provides a redundant path to the storage system in case one of the physical paths is disrupted. The multipath software presents the operating system with a single virtual device that represents the active physical paths to the storage. The multipath software also manages the failover process that updates the virtual device. For VMware, NVMe/FC uses High Performance Plugin (HPP).

Access SANtricity System Manager and use the Setup wizard

You use the Setup wizard in SANtricity System Manager to configure your storage system.

Before you begin

- You have ensured that the device from which you will access SANtricity System Manager contains one of the following browsers:

Table 2:

Browser	Minimum version
Google Chrome	47
Microsoft Internet Explorer	11
Microsoft Edge	EdgeHTML 12
Mozilla Firefox	31
Safari	9

- You are using out-of-band management.

About this task

If you are an iSCSI user, make sure you have closed the Setup wizard while configuring iSCSI.

The wizard automatically relaunches when you open SANtricity System Manager or refresh your browser and *at least one* of the following conditions is met:

- No pools and volume groups are detected.
- No workloads are detected.
- No notifications are configured.

If the Setup wizard does not automatically appear, contact Fujitsu Support.

Procedure

- From your browser, enter the following URL: `https://<DomainNameOrIPAddress>`

`IPAddress` is the address for one of the storage system controllers.

The first time SANtricity System Manager is opened on an array that has not been configured, the `Set Administrator Password` prompt appears. Role-based access management configures four local roles: admin, support, security, and monitor. The latter three roles have random passwords that cannot be guessed. After you set a password for the admin role you can change all of the passwords using the admin credentials. See *SANtricity System Manager online help* for more information on the four local user roles.

- Enter the SANtricity System Manager password for the admin role in the `Set Administrator Password` and `Confirm Password` fields, and then select the **Set Password** button.
When you open SANtricity System Manager and no pools, volumes groups, workloads, or notifications have been configured, the Setup wizard launches.
- Use the Setup wizard to perform the following tasks:
 - Verify hardware (controllers and drives)** – Verify the number of controllers and drives in the storage system. Assign a name to the array.
 - Verify hosts and operating systems** – Verify the host and operating system types that the storage system can access.
 - Accept pools** – Accept the recommended pool configuration for the express installation method. A pool is a logical group of drives.
 - Configure alerts** – Allow SANtricity System Manager to receive automatic notifications when a problem occurs with the storage system.

- **Enable AutoSupport** – Automatically monitor the health of your storage system and have dispatches sent to Fujitsu Support.
4. If you have not already created a volume, create one by going to **Storage > Volumes > Create > Volume**.

Note: For AB3100 and AB6100, you must set the block size to 512 bytes to ensure compatibility with VMware. Refer to the SANtricity System Manager online help for more information on setting a volume to 512 bytes.

Perform FC-specific tasks

For the Fibre Channel protocol, you configure the switches and determine the host port identifiers.

Configuring the FC switches - VMware

Configuring (zoning) the Fibre Channel (FC) switches enables the hosts to connect to the storage system and limits the number of paths. You zone the switches using the management interface for the switches.

Before you begin

- You must have administrator credentials for the switches.
- You must have used your HBA utility to discover the WWPN of each host initiator port and of each controller target port connected to the switch.

About this task

For details about zoning your switches, see the switch vendor's documentation.

Each initiator port must be in a separate zone with all of its corresponding target ports.

Procedure

1. Log in to the FC switch administration program, and then select the zoning configuration option.
2. Create a new zone that includes the first host initiator port and that also includes all of the target ports that connect to the same FC switch as the initiator.
3. Create additional zones for each FC host initiator port in the switch.
4. Save the zones, and then activate the new zoning configuration.

Determining the host port WWPNs—FC

To configure FC zoning, you must determine the worldwide port name (WWPN) of each initiator port.

Procedure

1. Connect to the ESXi host using SSH or the ESXi shell.
2. Run the following command:

```
esxcfg-scsidevs -a
```


3. Record the initiator identifiers. The output will be similar to this example:

```
vmhba3 lpfc link-up fc.20000090fa05e848:10000090fa05e848
(0000:03:00.0)
Emulex Corporation Emulex LPe16000 16Gb PCIe Fibre Channel Adapter
vmhba4 lpfc link-up fc.20000090fa05e849:10000090fa05e849
(0000:03:00.1)
Emulex Corporation Emulex LPe16000 16Gb PCIe Fibre Channel Adapter
```

FC worksheet for VMware

You can use this worksheet to record FC storage configuration information. You need this information to perform provisioning tasks.

The illustration shows a host connected to an ETERNUS AB/HB Series storage system in two zones. One zone is indicated by the blue line; the other zone is indicated by the red line. Each zone contains one initiator port and all target ports.

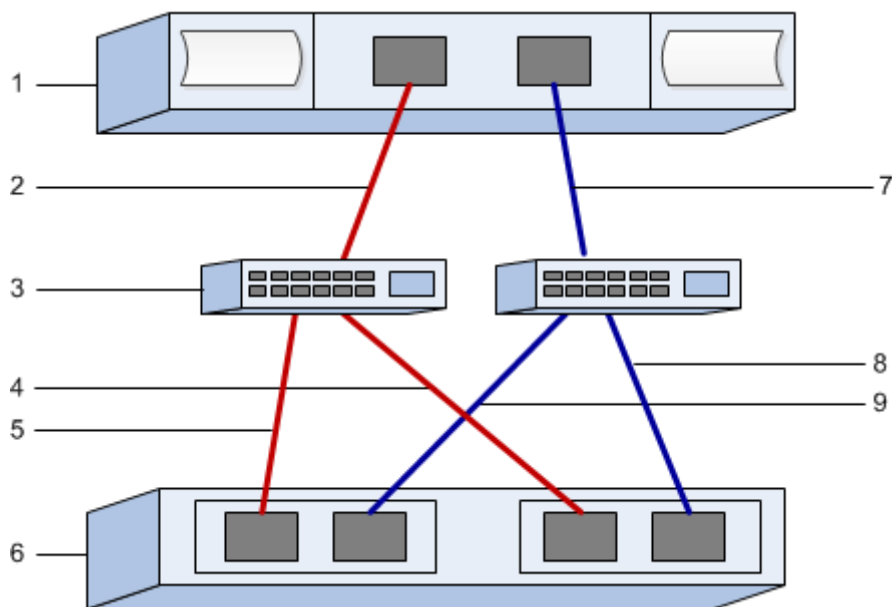

Host identifiers

Table 3:

Callout No.	Host (initiator) port connections	WWPN
1	Host	<i>not applicable</i>
2	Host port 0 to FC switch zone 0	
7	Host port 1 to FC switch zone 1	

Target identifiers

Table 4:

Callout No.	Array controller (target) port connections	WWPN
3	Switch	<i>not applicable</i>
6	Array controller (target)	<i>not applicable</i>
5	Controller A, port 1 to FC switch 1	
9	Controller A, port 2 to FC switch 2	
4	Controller B, port 1 to FC switch 1	
8	Controller B, port 2 to FC switch 2	

Mapping host

Table 5:

Mapping host name	
Host OS type	

Perform NVMe over FC-specific tasks

For the NVMe over Fibre Channel protocol, you configure the switches and determine the host port identifiers.

Configuring the NVMe/FC switches

Configuring (zoning) the NVMe over Fibre Channel (FC) switches enables the hosts to connect to the storage system and limits the number of paths. You zone the switches using the management interface for the switches.

Before you begin

- You must have administrator credentials for the switches.
- You must have used your HBA utility to discover the WWPN of each host initiator port and of each controller target port connected to the switch.

About this task

For details about zoning your switches, see the switch vendor's documentation.

Each initiator port must be in a separate zone with all of its corresponding target ports.

Procedure

1. Log in to the FC switch administration program, and then select the zoning configuration option.
2. Create a new zone that includes the first host initiator port and that also includes all of the target ports that connect to the same FC switch as the initiator.
3. Create additional zones for each FC host initiator port in the switch.
4. Save the zones, and then activate the new zoning configuration.

Determine the host ports WWPNs - NVMe/FC VMware

To configure FC zoning, you must determine the worldwide port name (WWPN) of each initiator port.

Procedure

1. Connect to the ESXi host using SSH or the ESXi shell.
2. Run the following command:

```
esxcfg-scsidevs -a
```

3. Record the initiator identifiers. The output will be similar to this example:

```
vmhba3 lpfc link-up fc.20000090fa05e848:10000090fa05e848
(0000:03:00.0)
Emulex Corporation Emulex LPe16000 16Gb PCIe Fibre Channel Adapter
vmhba4 lpfc link-up fc.20000090fa05e849:10000090fa05e849
(0000:03:00.1)
Emulex Corporation Emulex LPe16000 16Gb PCIe Fibre Channel Adapter
```

Enable HBA Driver

Support for NVMe must be enabled within Broadcom/Emulex and Marvell/Qlogic HBA drivers.

Procedure

1. Execute the following command from the ESXi shell:

- **Broadcom/Emulex HBA Driver**

```
esxcli system module parameters set -m lpfc -p
"lpfc_enable_fc4_type=3"
```

- **Marvell/Qlogic HBA Driver**


```
esxcfg-module -s "ql2xnvmesupport=1" qlnativefc
```

2. Reboot the host.

NVMe/FC worksheet for VMware

You can use this worksheet to record NVMe over Fibre Channel storage configuration information. You need this information to perform provisioning tasks.

The illustration shows a host connected to an ETERNUS AB/HB Series storage system in two zones. One zone is indicated by the blue line; the other zone is indicated by the red line. Each zone contains one initiator port and all target ports.

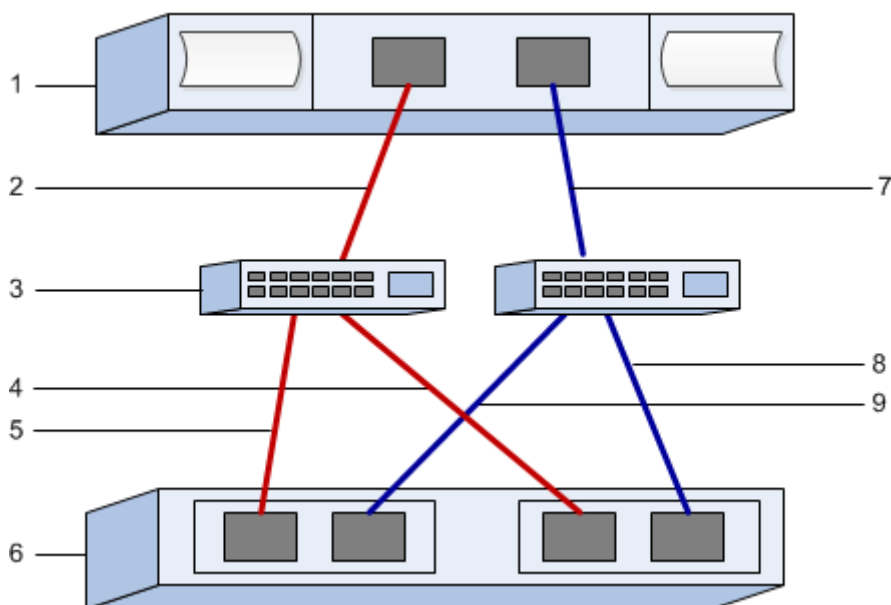

Host identifiers

Table 6:

Callout No.	Host (initiator) port connections	WWPN
1	Host	<i>not applicable</i>
2	Host port 0 to FC switch zone 0	
7	Host port 1 to FC switch zone 1	

Target identifiers**Table 7:**

Callout No.	Array controller (target) port connections	WWPN
3	Switch	<i>not applicable</i>
6	Array controller (target)	<i>not applicable</i>
5	Controller A, port 1 to FC switch 1	
9	Controller A, port 2 to FC switch 2	
4	Controller B, port 1 to FC switch 1	
8	Controller B, port 2 to FC switch 2	

Mapping host**Table 8:**

Mapping host name	
Host OS type	

Perform iSCSI-specific tasks

For the iSCSI protocol, you configure the switches and configure networking on the array side and the host side. Then you verify the IP network connections.

Configuring the switches - iSCSI, VMware

These recommendations might include both configuration directives as well as code updates.

You must ensure the following:

- You have two separate networks for high availability. Make sure that you isolate your iSCSI traffic to separate network segments.
- You have enabled send and receive hardware flow control **end to end**.
- You have disabled priority flow control.
- If appropriate, you have enabled jumbo frames.

Note: Port channels/LACP is not supported on the controller's switch ports. Host-side LACP is not recommended; multipathing provides the same, and in some cases better, benefits.

Configuring networking - iSCSI VMware

You can set up your iSCSI network in many ways, depending on your data storage requirements.

Consult your network administrator for tips on selecting the best configuration for your environment.

While planning your iSCSI networking, remember that the VMware Configuration Maximums guides state that the maximum supported iSCSI storage paths is 8. You must consider this requirement to avoid configuring too many paths.

By default, the VMware iSCSI software initiator creates a single session per iSCSI target when you are not using iSCSI port binding.

Note: VMware iSCSI port binding is a feature that forces all bound VMkernel ports to log into all target ports that are accessible on the configured network segments. It is meant to be used with arrays that present a single network address for the iSCSI target. Fujitsu recommends that iSCSI port binding not be used. For additional information, see the [VMware Knowledge Base](#) for the article regarding considerations for using software iSCSI port binding in ESX/ESXi.

For best practice, it is recommended not to use port binding on ETERNUS AB/HB Series storage systems.

To ensure a good multipathing configuration, use multiple network segments for the iSCSI network. Place at least one host-side port and at least one port from each array controller on one network segment, and an identical group of host-side and array-side ports on another network segment. Where possible, use multiple Ethernet switches to provide additional redundancy.

You must enable send and receive hardware flow control **end to end**. You must disable priority flow control.

If you are using jumbo frames within the IP SAN for performance reasons, make sure to configure the array, switches, and hosts to use jumbo frames. Consult your operating system and switch documentation for information on how to enable jumbo frames on the hosts and on the switches. To enable jumbo frames on the array, complete the steps in *Configuring array-side networking—iSCSI*.

Note: Many network switches have to be configured above 9,000 bytes for IP overhead. Consult your switch documentation for more information.

Configuring array-side networking - iSCSI, VMware

You use the SANtricity System Manager GUI to configure iSCSI networking on the array side.

Before you begin

- You must know the IP address or domain name for one of the storage system controllers.
- You or your system administrator must have set up a password for the SANtricity System Manager GUI, or you must configured Role-Based Access Control (RBAC) or LDAP and a directory service for the appropriate security access to the storage system. See the *SANtricity System Manager online help* for more information about Access Management.

About this task

This task describes how to access the iSCSI port configuration from the Hardware page. You can also access the configuration from **System > Settings > Configure iSCSI ports**.

Procedure

1. From your browser, enter the following URL: `https://<DomainNameOrIPAddress>`
`IPAddress` is the address for one of the storage system controllers.
 The first time SANtricity System Manager is opened on an array that has not been configured, the `Set Administrator Password` prompt appears. Role-based access management configures four local roles: admin, support, security, and monitor. The latter three roles have random passwords that cannot be guessed. After you set a password for the admin role you can change all of the passwords using the admin credentials. See *SANtricity System Manager online help* for more information on the four local user roles.
2. Enter the SANtricity System Manager password for the admin role in the `Set Administrator Password` and `Confirm Password` fields, and then select the **Set Password** button.
 When you open SANtricity System Manager and no pools, volumes groups, workloads, or notifications have been configured, the Setup wizard launches.
3. Close the Setup wizard.
 You will use the wizard later to complete additional setup tasks.
4. Select **Hardware**.
5. If the graphic shows the drives, click **Show back of shelf**.
 The graphic changes to show the controllers instead of the drives.
6. Click the controller with the iSCSI ports you want to configure.
 The controller's context menu appears.
7. Select **Configure iSCSI ports**.
 The Configure iSCSI Ports dialog box opens.
8. In the drop-down list, select the port you want to configure, and then click **Next**.
9. Select the configuration port settings, and then click **Next**.
 To see all port settings, click the **Show more port settings** link on the right of the dialog box.

Table 9:

Port Setting	Description
Configured ethernet port speed	<p>Select the desired speed.</p> <p>The options that appear in the drop-down list depend on the maximum speed that your network can support (for example, 10 Gbps).</p> <p>Note: The optional 25 Gbps iSCSI host interface cards available on the controllers do not auto-negotiate speeds. You must set the speed for each port to either 10 Gbps or 25 Gbps. All ports must be set to the same speed.</p>
Enable IPv4 / Enable IPv6	Select one or both options to enable support for IPv4 and IPv6 networks.

Port Setting	Description
TCP listening port (Available by clicking Show more port settings.)	If necessary, enter a new port number. The listening port is the TCP port number that the controller uses to listen for iSCSI logins from host iSCSI initiators. The default listening port is 3260. You must enter 3260 or a value between 49152 and 65535.
MTU size (Available by clicking Show more port settings.)	If necessary, enter a new size in bytes for the Maximum Transmission Unit (MTU). The default Maximum Transmission Unit (MTU) size is 1500 bytes per frame. You must enter a value between 1500 and 9000.
Enable ICMP PING responses	Select this option to enable the Internet Control Message Protocol (ICMP). The operating systems of networked computers use this protocol to send messages. These ICMP messages determine whether a host is reachable and how long it takes to get packets to and from that host.

If you selected **Enable IPv4**, a dialog box opens for selecting IPv4 settings after you click **Next**. If you selected **Enable IPv6**, a dialog box opens for selecting IPv6 settings after you click **Next**. If you selected both options, the dialog box for IPv4 settings opens first, and then after you click **Next**, the dialog box for IPv6 settings opens.

10. Configure the IPv4 and/or IPv6 settings, either automatically or manually. To see all port settings, click the **Show more settings** link on the right of the dialog box.

Table 10:

Port setting	Description
Automatically obtain configuration	Select this option to obtain the configuration automatically.
Manually specify static configuration	Select this option, and then enter a static address in the fields. For IPv4, include the network subnet mask and gateway. For IPv6, include the routable IP address and router IP address.

11. Click **Finish**.

12. Close SANtricity System Manager.

Related tasks

[Access SANtricity System Manager and use the Setup wizard](#) on page 9

Configuring host-side networking—iSCSI

Configuring iSCSI networking on the host side enables the VMware iSCSI initiator to establish a session with the array.

About this task

In this express method for configuring iSCSI networking on the host side, you allow the ESXi host to carry iSCSI traffic over four redundant paths to the storage.

After you complete this task, the host is configured with a single vSwitch containing both VMkernel ports and both VMNICs.

For additional information on configuring iSCSI networking for VMware, see the vSphere Manual Site for your version of vSphere.

Procedure

1. Configure the switches that will be used to carry iSCSI storage traffic.
2. Enable send and receive hardware flow control **end to end**.
3. Disable priority flow control.
4. Complete the array side iSCSI configuration.
5. Use two NIC ports for iSCSI traffic.
6. Use either the vSphere client or vSphere web client to perform the host-side configuration.
The interfaces vary in functionality and the exact workflow will vary.

Verifying IP network connections - iSCSI, VMware

You verify Internet Protocol (IP) network connections by using ping tests to ensure the host and array are able to communicate.

Procedure

1. On the host, run one of the following commands, depending on whether jumbo frames are enabled:
 - If jumbo frames are not enabled, run this command:

```
vmkping <iSCSI_target_IP_address>
```

- If jumbo frames are enabled, run the `ping` command with a payload size of 8,972 bytes. The IP and ICMP combined headers are 28 bytes, which when added to the payload, equals 9,000 bytes. The `-s` switch sets the `packet size` bit. The `-d` switch sets the DF (Don't Fragment) bit on the IPv4 packet. These options allow jumbo frames of 9,000 bytes to be successfully transmitted between the iSCSI initiator and the target.

```
vmkping -s 8972 -d <iSCSI_target_IP_address>
```

In this example, the iSCSI target IP address is 192.0.2.8.

```
vmkping -s 8972 -d 192.0.2.8
Pinging 192.0.2.8 with 8972 bytes of data:
Reply from 192.0.2.8: bytes=8972 time=2ms TTL=64
Reply from 192.0.2.8: bytes=8972 time=2ms TTL=64
Reply from 192.0.2.8: bytes=8972 time=2ms TTL=64
Reply from 192.0.2.8: bytes=8972 time=2ms TTL=64
Ping statistics for 192.0.2.8:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms
```

2. Issue a `vmkping` command from each host's initiator address (the IP address of the host Ethernet port used for iSCSI) to each controller iSCSI port. Perform this action from each host server in the configuration, changing the IP addresses as necessary.

Note: If the command fails with the message `sendto() failed (Message too long)`, verify the MTU size (jumbo frame support) for the Ethernet interfaces on the host server, storage controller, and switch ports.

3. Return to the iSCSI Configuration procedure to finish target discovery.

Recording iSCSI-specific information for VMware


Select the iSCSI worksheet to record your protocol-specific storage configuration information. You need this information to perform provisioning tasks.

iSCSI worksheet - VMware

You can use this worksheet to record iSCSI storage configuration information. You need this information to perform provisioning tasks.

Recommended configuration

Recommended configurations consist of two initiator ports and four target ports with one or more VLANs.

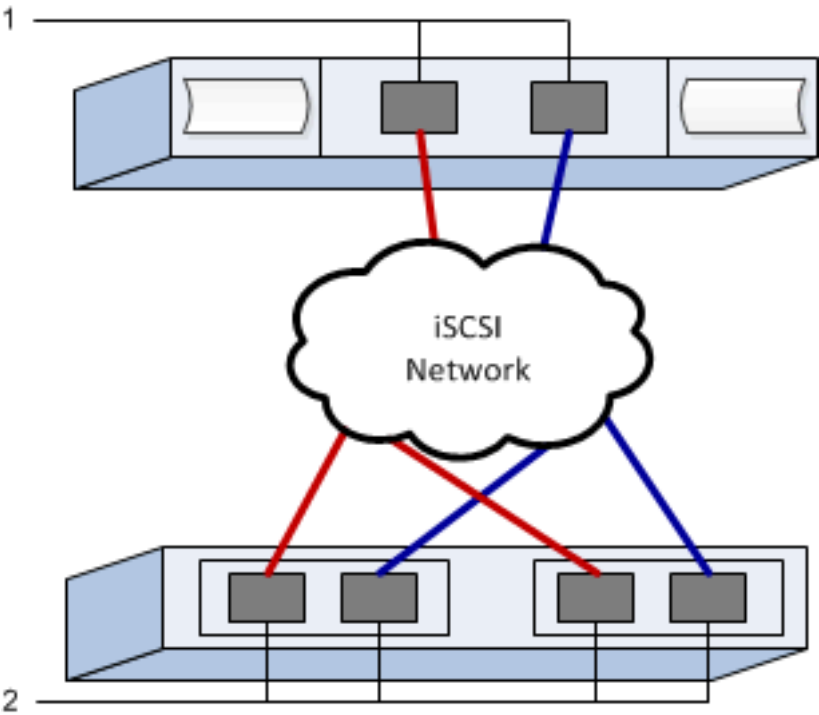

Target IQN

Table 11:

Callout No.	Target port connection	IQN
2	Target port	

Mappings host name

Table 12:

Callout No.	Host information	Name and type
1	Mappings host name	
	Host OS type	

Perform SAS-specific tasks

For the SAS protocol, you determine host port addresses and make the settings recommended in the Server Support Matrix. Please contact Fujitsu support personnel for the Server Support Matrix.

Determining SAS host identifiers - VMware

For the SAS protocol, you find the SAS addresses using the HBA utility, then use the HBA BIOS to make the appropriate configuration settings.

About this task

Guidelines for HBA utilities:

- Host I/O ports might automatically register if the host context agent is installed.

Procedure

1. Download the HBA utility from your HBA vendor's web site.
2. Install the utility.
3. Use the HBA BIOS to select the appropriate settings for your configuration.


See the Server Support Matrix for recommendations. Please contact Fujitsu support personnel for the Server Support Matrix.

Recording SAS-specific information for VMware

Record your protocol-specific storage configuration information on the SAS worksheet. You need this information to perform provisioning tasks.

SAS worksheet - VMware

You can use this worksheet to record SAS storage configuration information. You need this information to perform provisioning tasks.

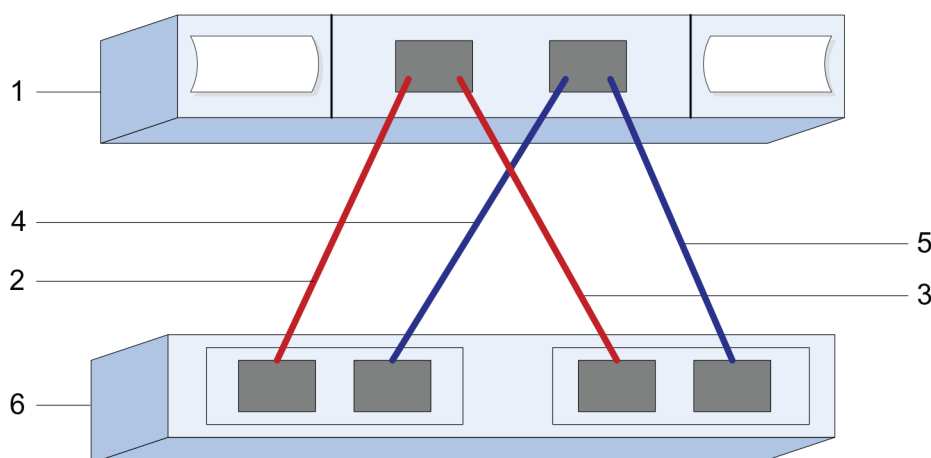

Host Identifiers

Table 13:

Callout No.	Host (initiator) port connections	SAS address
1	Host	<i>not applicable</i>
2	Host (initiator) port 1 connected to Controller A, port 1	
3	Host (initiator) port 1 connected to Controller B, port 1	
4	Host (initiator) port 2 connected to Controller A, port 1	
5	Host (initiator) port 2 connected to Controller B, port 1	

Target Identifiers

Recommended configurations consist of two target ports.

Mappings Host

Table 14:

Mappings Host Name	
Host OS Type	

Discover storage on the host

After assigning volumes to the host, you perform a rescan so that the host detects and configures the volumes for multipathing.

About this task

By default, an ESXi host automatically performs a rescan every five minutes. A volume might appear between the time you create it and assign it to a host, before you perform a manual rescan. Regardless, you can perform a manual rescan to ensure all volumes are configured properly.

Procedure

1. Create one or more volumes and assign them to the ESXi host.
2. If using a vCenter Server, add the host to the server's inventory.
3. Use the vSphere Client or the vSphere Web Client to connect directly to the vCenter Server or to the ESXi host.
4. For instructions on how to perform a rescan of the storage on an ESXi host, search for the VMware Knowledge Base article on this topic.

Configure storage on the host

You can use the storage assigned to an ESXi host as either a Virtual Machine File System (VMFS) datastore or a raw device mapping (RDM). RDMs are not supported on the NVMe over Fibre Channel protocol.

Before you begin

The volumes mapped to the ESXi host must have been discovered properly.

About this task

All 6.x and 7 x versions of ESXi support VMFS versions 5 and 6.

Procedure

- For instructions on creating VMFS datastores using either the vSphere Client or the vSphere Web Client, see the VMware pubs webpage (<https://www.vmware.com/support/pubs/>) for documentation on this topic.
- For instructions on using volumes as RDMs using either the vSphere Client or the vSphere Web Client, see the VMware pubs webpage (<https://www.vmware.com/support/pubs/>) for documentation on this topic.

Related tasks

[Discover storage on the host](#) on page 23

Verify storage access on the host

Before you use a volume, you verify that the host can write data to the volume and read it back.

Procedure

Verify that the volume has been used as a Virtual Machine File System (VMFS) datastore or has been mapped directly to a VM for use as a raw device mapping (RDM).

Related tasks

[Configure storage on the host](#) on page 24

Where to find additional information

Use the resources listed here if you need additional information. You can also use the online help for SANtricity System Manager.

- Online help describes how to use SANtricity System Manager to complete configuration and storage management tasks. It is available within the product.
- **VMware Configuration Maximums** describe how to configure virtual and physical storage to stay within the allowed maximums that ESX/ESXi supports.

vSphere 6.x - search vmware.com for "vsphere 6.x configuration maximums."

vSphere 7.x - search vmware.com for "vsphere 7.x configuration maximums."

- Other VMware Publications. Search vmware.com for ESXi vCenter Server documentation.

Copyright and trademark

Copyright

Copyright 2021 FUJITSU LIMITED. All rights reserved.

No part of this document covered by copyright may be reproduced in any form or by any means - graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system - without prior written permission of the copyright owner.

Software derived from copyrighted Fujitsu material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY FUJITSU "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL FUJITSU BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Fujitsu reserves the right to change any products described herein at any time, and without notice. Fujitsu assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by Fujitsu. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of Fujitsu.

Trademark

FUJITSU, FUJITSU logo, and ETERNUS are trademarks of Fujitsu. All other trademarks are the property of their respective owners.

<https://www.fujitsu.com/global/products/computing/storage/eternus/trademarks.html>

How to send comments about documentation and receive update notifications

The latest version of this document and the latest information related to this device are available at the following site.

<https://www.fujitsu.com/global/support/products/computing/storage/manuals-list.html>

If necessary, refer to the manuals for your model.

FUJITSU Storage ETERNUS AB/HB Series

Express Configuration

For VMware®

A3CA08733-A106-03

Date of issuance: June 2021

Issuance responsibility: FUJITSU LIMITED

- The content of this manual is subject to change without notice.

- This manual was prepared with the utmost attention to detail.

However, Fujitsu shall assume no responsibility for any operational problems as the result of errors, omissions, or the use of information in this manual.

- Fujitsu assumes no liability for damages to third party copyrights or other rights arising from the use of any information in this manual.

- The content of this manual may not be reproduced or distributed in part or in its entirety without prior permission from Fujitsu.