

Datasheet

PRIMEFLEX for Nutanix Enterprise Cloud

XF M2 Version

PRIMEFLEX for Nutanix Enterprise Cloud is a multi-cloud, multi-hypervisor platform that includes all the hardware and software to simplify procurement and deployment by using hyper-converged building blocks.

PRIMEFLEX for Nutanix Enterprise Cloud

A multi-cloud, multi-hypervisor platform that includes all the hardware and software to simplify procurement and deployment by using hyper-converged building blocks. It leverages high performance, energy-efficient FUJITSU PRIMERGY standard x86 servers and the software-defined compute, virtualization and storage technology in the Nutanix Acropolis cloud OS, Prism management and Calm orchestration. The result is reduced complexity and vastly superior TCO from this multi-cloud infrastructure environment.

Need for speed

PRIMEFLEX for Nutanix Enterprise Cloud provides support for industry-leading hypervisors, including the built-in Nutanix AHV hypervisor in combination with high speed flash disk devices and high-throughput, low-latency networking technology. You can therefore set up a high-performance, responsive virtual IT infrastructure that provides consistent IOPS with sub-millisecond response times. In all-flash or hybrid disk configurations, PRIMEFLEX for Nutanix Enterprise Cloud easily exceeds 250,000 IO Operations per Second (IOPS).

Protect your business

Built-in resiliency handles drive, server, or component failures – delivering continuous availability. If hardware fails, just swap it out; the software heals itself, with no complicated management steps.

Grow as you go


Scale your environment to an endless number of systems and unlimited storage. To scale out, simply add more system nodes. PRIMEFLEX for Nutanix Enterprise Cloud will automatically onboard new nodes and begin using them.

Simplify infrastructure setup

Once you have the systems mounted and cabled in a rack, the Linux or Windows operating system installed, and networking configured, you're looking at under 15 minutes to get the cluster configured.

Simplify infrastructure management

No specialized skill or expensive training is required – perfect for environments such as remote or branch office locations with limited IT staff to even the most demanding enterprise data centers. Integrated load balancing automatically migrates overly busy VMs to other system nodes in the cluster to ensure service levels are consistent. The Nutanix Prism management tool provides continuous built-in monitoring and alerting, and APIs make it easy to collect rich, cluster-wide performance and capacity metrics. Nutanix Calm application lifecycle management and cloud orchestration accelerates application deployments into private or public cloud environments.

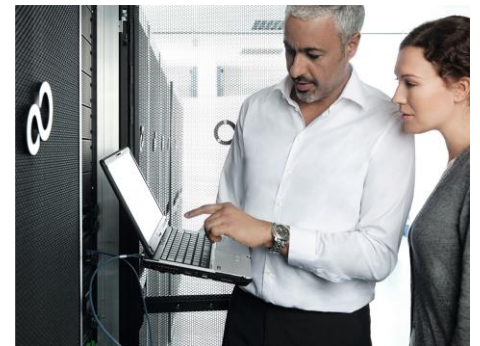

Hardware advantages

PRIMEFLEX for Nutanix Enterprise Cloud is fully tested and delivered on a high-performance and energy-efficient server platform for multiple leading hypervisor cluster environments – FUJITSU Server PRIMERGY powered by Intel® Xeon® processors. As well as excellent virtualization performance, the servers deliver the best economics in terms of density, energy consumption, heat dissipation and operating costs. In addition, Fujitsu provides intelligent and innovative system management solutions providing all the functions for failsafe, flexible and automated 24x7 server operations.



Features and benefits

Main features	Benefits
Improve storage efficiency	Unique innovations offer better space and performance trade-offs than classic RAID configurations. Erasure coding and advanced compression deliver up to 4x greater storage efficiency.
Reduce storage costs	PRIMEFLEX for Nutanix Enterprise Cloud uses on-board storage local to each node. This reduces costs and eliminates the need for extra tools and training for managing complex external SAN infrastructures.
Flexible choice of leading hypervisors optimizes cost of virtualization	Customers can choose their preferred hypervisor ranging from the built-in Nutanix AHV to VMware ESXi. Customers have the option to also switch between hypervisors with a single-click migration.
Save floor space, power and cooling	The convergence of compute and storage resources in an industry-standard server reduces your infrastructure footprint, saves floor space, power and cooling expenses.
More time for value-added activity	Since server and storage management are consolidated, you can move valuable staff resources from infrastructure related management tasks to activities that create business value.

The diagram illustrates the Nutanix Enterprise Cloud architecture layers. From top to bottom, the layers are: Enterprise, Essentials, Prism (management), AHV and ESXi (grouped in a dashed box labeled 'Core'), Acropolis OS, PRIMERGY, HDD and SSD (grouped), and 10 or 25 GbE.

The PRIMEFLEX logo features a central red circle with the text 'Nutanix Enterprise Cloud'. This is surrounded by a grey ring divided into three segments labeled 'Server', 'Storage', and 'Connectivity'. The word 'PRIMEFLEX' is written in a large, red, curved font across the top of the diagram.

Reasons to invest in PRIMEFLEX for Nutanix Enterprise Cloud

Get fast time to value

Mitigate risk with turnkey factory integrated delivery and automated start up and benefit from 61% time savings to deploy, manage, and support.

Enjoy high application performance

Get maximum performance with Fujitsu standard x86-servers delivering the most powerful virtualization platform leading 16 out of 21 VMmark benchmark categories.

Unify infrastructure management

Get a centralized view of both the physical and logical infrastructure across multiple nodes, clusters and clouds – from hardware device level to network topology to virtual machines.

Protect your business

Ensure your data is secure with a system that meets the most demanding government and commercial security standards. Achieve peace of mind with built-in automated security monitoring and self-healing.

Reduce infrastructure costs

Profit from hyper-converged infrastructure using local storage with multi-hypervisor support and reduce costs for maintaining a complex external SAN infrastructure.

Eliminate unplanned downtime

Built-in resiliency handles compute, storage, or network component failures – delivering 97% fewer unplanned outages.

Increase network security

Get fully integrated physical and virtual networking and higher levels of security by leveraging micro-segmentation.

Grow as you go

Get non-disruptive linear scalability for an endless number of systems, and an unlimited amount of raw storage.

World-class support

Get 24/7 support for the complete hardware and software stack with a single point of contact.

More time for value-added activity

Remove focus on maintaining infrastructure and move valuable staff resources to activities that create business value.



Learn more about PRIMEFLEX for Nutanix Enterprise Cloud:

<https://www.fujitsu.com/nutanix>

Technical Details

Server Model	XF1070 M2
Chassis	PRIMERGY RX2530 M5 4x3.5"
CPU Options	1x Intel Xeon Silver 4208 8C 2.10 GHz 1x Intel Xeon Silver 4210 10C 2.20 GHz 1x Intel Xeon Silver 4210R 10C 2.40 GHz 1x Intel Xeon Silver 4214R 12C 2.40 GHz 1x Intel Xeon Silver 4215 8C 2.50 GHz 1x Intel Xeon Silver 4215R 8C 3.20 GHz 1x Intel Xeon Gold 5215 10C 2.50 GHz 1x Intel Xeon Gold 6240 18C 2.60 GHz 1x Intel Xeon Gold 6210U 20C 2.50 GHz 1x Intel Xeon Gold 6226R 16C 2.90 GHz 1x Intel Xeon Gold 6240R 24C 2.40 GHz 1x Intel Xeon Gold 6244 8C 3.60 GHz
Memory Options (no model mix)	8x or 12x 8GB (1x8GB) 1Rx4 DDR4-2933 R ECC (64 or 96GB) 8x or 12x 16GB (1x16GB) 1Rx4 DDR4-2933 R ECC (128 or 192 GB) 8x or 12x 32GB (1x32GB) 2Rx4 DDR4-2933 R ECC (256 or 384GB) 8x or 12x 64GB (1x64GB) 4Rx4 DDR4-2933 LR ECC (256 or 768GB)
SSD Options (no model mix)	SSD SATA 6G 1.92TB Read-Int. 3.5" PM883 SSD SATA 6G 3.84TB Read-Int. 3.5" PM883 SSD SATA 6G 960GB Mixed-Use 3.5" H-P EP SSD SATA 6G 1.92TB Mixed-Use 3.5" H-P EP SSD SATA 6G 3.84TB Mixed-Use 3.5" H-P EP SSD SAS 12G 7.68TB Read-Int. 3.5" PM1643a
HDD Options (no model mix)	HD SAS 12G 2TB 7.2K HOT PL 3.5" BC HD SAS 12G 4TB 7.2K HOT PL 3.5" BC HD SAS 12G 6TB 7.2K 512e HOT PL 3.5" BC HD SAS 12G 8TB 7.2K 512e HOT PL 3.5" BC HD SAS 12G 12TB 7.2K 512e HOT PL 3.5" BC HD SAS 12G 14TB 7.2K 512e HOT PL 3.5" BC HD SAS 12G 16TB 7.2K 512e HOT PL 3.5" BC
All Flash Disk Configs	2x or 4x SSD (up to 30.72TB)
Hybrid Disk Configs	2x SSD and 2x HD (up to 15.36TB SSD and 32TB HD)
Boot device	1x SSD SATA 6G 240GB or 480GB M.2 N H-P 1x PDUAL CP200 and 2x SSD SATA 6G 240GB or 480GB M.2 N H-P
LAN Options	PLAN EP X710-DA2 2x10Gb SFP+ LP PLAN EP X710-DA4 4x10Gb SFP+ LP PLAN EP X550-T2 2x10GBASE-T LP PLAN EP MCX4-LX 25Gb 2p SFP28 LP
SAS Controller	PSAS CP403i/CP503i
Power Supplies	2x Modular PSU 450W platinum hp 2x Modular PSU 800W platinum hp 2x Modular PSU DC -48V 800W Platinum hp

Server Model	XF3070 M2
Chassis	PRIMERGY RX2530 M5 10x2.5"
CPU Options	2x Intel Xeon Silver 4208 8C 2.10 GHz 2x Intel Xeon Silver 4210 10C 2.20 GHz 2x Intel Xeon Silver 4210R 10C 2.40 GHz 2x Intel Xeon Silver 4214 12C 2.20 GHz 2x Intel Xeon Silver 4214R 12C 2.40 GHz 2x Intel Xeon Silver 4215 8C 2.50 GHz 2x Intel Xeon Silver 4215R 8C 3.20 GHz 2x Intel Xeon Silver 4216 16C 2.10 GHz 2x Intel Xeon Silver 4214Y 8/10/12C 2.20 GHz 2x Intel Xeon Gold 5215 10C 2.50 GHz 2x Intel Xeon Gold 5217 8C 3.0GHz 2x Intel Xeon Gold 5218 16C 2.30 GHz 2x Intel Xeon Gold 5218B 16C 2.30 GHz 2x Intel Xeon Gold 5218R 20C 2.10 GHz 2x Intel Xeon Gold 5220 18C 2.20 GHz 2x Intel Xeon Gold 5220R 24C 2.20 GHz 2x Intel Xeon Gold 5220S 18C 2.60 GHz 2x Intel Xeon Gold 6226 12C 2.80 GHz 2x Intel Xeon Gold 6226R 16C 2.90 GHz 2x Intel Xeon Gold 6230 20C 2.10 GHz 2x Intel Xeon Gold 6230R 26C 2.10 GHz 2x Intel Xeon Gold 6234 8C 3.40 GHz 2x Intel Xeon Gold 6238 22C 2.10 GHz 2x Intel Xeon Gold 6238R 28C 2.20 GHz 2x Intel Xeon Gold 6240 18C 2.60 GHz 2x Intel Xeon Gold 6240R 24C 2.40 GHz 2x Intel Xeon Gold 6242 16C 2.80 GHz 2x Intel Xeon Gold 6242R 20C 3.10 GHz 2x Intel Xeon Gold 6244 8C 3.60 GHz 2x Intel Xeon Gold 6246 12C 3.30 GHz 2x Intel Xeon Gold 6246R 16C 3.40 GHz 2x Intel Xeon Gold 6248 20C 2.50 GHz 2x Intel Xeon Gold 6248R 24C 3.00 GHz 2x Intel Xeon Gold 6250 8C 3.90 GHz 2x Intel Xeon Gold 6252 24C 2.10 GHz 2x Intel Xeon Gold 6254 18C 3.10 GHz 2x Intel Xeon Gold 6256 12C 3.60 GHz 2x Intel Xeon Gold 6258R 28C 2.70 GHz 2x Intel Xeon Gold 6222V 20C 1.80 GHz 2x Intel Xeon Gold 6262V 24C 1.90 GHz 2x Intel Xeon Gold 5215L 10C 2.50 GHz 2x Intel Xeon Gold 6238L 22C 2.10 GHz 2x Intel Xeon Gold 6240L 18C 2.60 GHz 2x Intel Xeon Gold 6240Y 8/14/18C 2.60 GHz 2x Intel Xeon Platinum 8260 24C 2.40 GHz 2x Intel Xeon Platinum 8268 24C 2.90 GHz 2x Intel Xeon Platinum 8270 26C 2.70 GHz 2x Intel Xeon Platinum 8276 28C 2.30 GHz 2x Intel Xeon Platinum 8280 28C 2.70 GHz 2x Intel Xeon Platinum 8260L 24C 2.40 GHz 2x Intel Xeon Platinum 8276L 28C 2.30 GHz 2x Intel Xeon Platinum 8280L 28C 2.70 GHz 2x Intel Xeon Platinum 8260Y 16/20/24C 2.40 GHz
Memory Options (no model mix)	8x, 12x, 16x or 24x 8GB (1x8GB) 1Rx4 DDR4-2933 R ECC (up to 192GB) 8x, 12x, 16x or 24x 16GB (1x16GB) 1Rx4 DDR4-2933 R ECC (up to 384GB) 8x, 12x, 16x or 24x 32GB (1x32GB) 2Rx4 DDR4-2933 R ECC (up to 768GB) 12x, 16x or 24x 64GB (1x64GB) 4Rx4 DDR4-2933 LR ECC (up to 1536GB) 12x, 16x or 24x 128GB (1x128GB) 4Rx4 DDR4-2933 LR ECC (up to 3072GB)
SSD Options (no model mix)	SSD SATA 6G 1.92TB Read-Int. 2.5" PM883 SSD SATA 6G 3.84TB Read-Int. 2.5" PM883 SSD SATA 6G 960GB Mixed-Use 2.5" H-P EP SSD SATA 6G 1.92TB Mixed-Use 2.5" H-P EP SSD SATA 6G 3.84TB Mixed-Use 2.5" H-P EP SSD SAS 12G 7.68TB Read-Int. 2.5" PM1643a
HDD Options (no model mix)	HD SATA 6G 1TB 7.2K 512e HOT PL 2.5" BC HD SATA 6G 2TB 7.2K 512e HOT PL 2.5" BC HD SAS 12G 1.2TB 10K 512e HOT PL 2.5" EP HD SAS 12G 1.8TB 10K 512e HOT PL 2.5" EP HD SAS 12G 2.4TB 10K 512e HOT PL 2.5" EP
All Flash Disk Configs	2x, 4x, 6x, 8x or 10x SSD (up to 76.8TB)
Hybrid Disk Configs	2x SSD and 4x, 6x or 8x HD (up to 15.36TB SSD and 19.2TB HD)
Boot device	1x SSD SATA 6G 240GB or 480GB M.2 N H-P 1x PDUAL CP200 and 2x SSD SATA 6G 240GB or 480GB M.2 N H-P
LAN Options	PLAN EP X710-DA2 2x10Gb SFP+ LP PLAN EP X710-DA4 4x10Gb SFP+ LP PLAN EP X550-T2 2x10GBASE-T LP PLAN EP MCX4-LX 25Gb 2p SFP28 LP
SAS Controller	PSAS CP403i/CP503i
Power Supplies	2x Modular PSU 450W platinum hp 2x Modular PSU 800W platinum hp 2x Modular PSU 1200W platinum hp 2x Modular PSU DC -48V 800W Platinum hp

Server Model	XF8050 M2
Chassis	PRIMERGY RX2540 M5 24x2.5"
CPU Options	2x Intel Xeon Silver 4208 8C 2.10 GHz 2x Intel Xeon Silver 4210 10C 2.20 GHz 2x Intel Xeon Silver 4210R 10C 2.40 GHz 2x Intel Xeon Silver 4214 12C 2.20 GHz 2x Intel Xeon Silver 4214R 12C 2.40 GHz 2x Intel Xeon Silver 4215 8C 2.50 GHz 2x Intel Xeon Silver 4215R 8C 3.20 GHz 2x Intel Xeon Silver 4216 16C 2.10 GHz 2x Intel Xeon Silver 4214Y 8/10/12C 2.20 GHz 2x Intel Xeon Gold 5215 10C 2.50 GHz 2x Intel Xeon Gold 5217 8C 3.0GHz 2x Intel Xeon Gold 5218 16C 2.30 GHz 2x Intel Xeon Gold 5218B 16C 2.30 GHz 2x Intel Xeon Gold 5218R 20C 2.10 GHz 2x Intel Xeon Gold 5220 18C 2.20 GHz 2x Intel Xeon Gold 5220R 24C 2.20 GHz 2x Intel Xeon Gold 5220S 18C 2.60 GHz 2x Intel Xeon Gold 6226 12C 2.80 GHz 2x Intel Xeon Gold 6226R 16C 2.90 GHz 2x Intel Xeon Gold 6230 20C 2.10 GHz 2x Intel Xeon Gold 6230R 26C 2.10 GHz 2x Intel Xeon Gold 6234 8C 3.40 GHz 2x Intel Xeon Gold 6238 22C 2.10 GHz 2x Intel Xeon Gold 6238R 28C 2.20 GHz 2x Intel Xeon Gold 6240 18C 2.60 GHz 2x Intel Xeon Gold 6240R 24C 2.40 GHz 2x Intel Xeon Gold 6242 16C 2.80 GHz 2x Intel Xeon Gold 6242R 20C 3.10 GHz 2x Intel Xeon Gold 6244 8C 3.60 GHz 2x Intel Xeon Gold 6246 12C 3.30 GHz 2x Intel Xeon Gold 6246R 16C 3.40 GHz 2x Intel Xeon Gold 6248 20C 2.50 GHz 2x Intel Xeon Gold 6248R 24C 3.00 GHz 2x Intel Xeon Gold 6250 8C 3.90 GHz 2x Intel Xeon Gold 6252 24C 2.10 GHz 2x Intel Xeon Gold 6254 18C 3.10 GHz 2x Intel Xeon Gold 6256 12C 3.60 GHz 2x Intel Xeon Gold 6258R 28C 2.70 GHz 2x Intel Xeon Gold 6222V 20C 1.80 GHz 2x Intel Xeon Gold 6262V 24C 1.90 GHz 2x Intel Xeon Gold 5215L 10C 2.50 GHz 2x Intel Xeon Gold 6238L 22C 2.10 GHz 2x Intel Xeon Gold 6240L 18C 2.60 GHz 2x Intel Xeon Gold 6240Y 8/14/18C 2.60 GHz 2x Intel Xeon Platinum 8260 24C 2.40 GHz 2x Intel Xeon Platinum 8268 24C 2.90 GHz 2x Intel Xeon Platinum 8270 26C 2.70 GHz 2x Intel Xeon Platinum 8276 28C 2.30 GHz 2x Intel Xeon Platinum 8280 28C 2.70 GHz 2x Intel Xeon Platinum 8260L 24C 2.40 GHz 2x Intel Xeon Platinum 8276L 28C 2.30 GHz 2x Intel Xeon Platinum 8280L 28C 2.70 GHz 2x Intel Xeon Platinum 8260Y 16/20/24C 2.40 GHz
GPU Option	1x or 2x PY NVIDIA Tesla T4
Memory Options (no model mix)	8x, 12x, 16x or 24x 8GB (1x8GB) 1Rx4 DDR4-2933 R ECC (up to 192GB) 8x, 12x, 16x or 24x 16GB (1x16GB) 1Rx4 DDR4-2933 R ECC (up to 384GB) 8x, 12x, 16x or 24x 32GB (1x32GB) 2Rx4 DDR4-2933 R ECC (up to 768GB) 12x, 16x or 24x 64GB (1x64GB) 4Rx4 DDR4-2933 LR ECC (up to 1536GB) 12x, 16x or 24x 128GB (1x128GB) 4Rx4 DDR4-2933 LR ECC (up to 3072GB)
SSD Options (no model mix)	SSD SATA 6G 1.92TB Read-Int. 2.5" PM883 SSD SATA 6G 3.84TB Read-Int. 2.5" PM883 SSD SATA 6G 960GB Mixed-Use 2.5" H-P EP SSD SATA 6G 1.92TB Mixed-Use 2.5" H-P EP SSD SATA 6G 3.84TB Mixed-Use 2.5" H-P EP SSD SAS 12G 7.68TB Read-Int. 2.5" PM1643a
HDD Options (no model mix)	HD SATA 6G 1TB 7.2K 512e HOT PL 2.5" BC HD SATA 6G 2TB 7.2K 512e HOT PL 2.5" BC HD SAS 12G 1.2TB 10K 512e HOT PL 2.5" EP HD SAS 12G 1.8TB 10K 512e HOT PL 2.5" EP HD SAS 12G 2.4TB 10K 512e HOT PL 2.5" EP
All Flash Disk Configs	4x, 6x, 8x, 10x, 12x, 14x, 16x, 18x, 20x, 22x or 24x SSD (up to 122.88TB, max. 16x 7.68 TB)
Hybrid Disk Configs	4x SSD and 8x, 10x, 12x, 14x, 16x, 18x or 20x HD (up to 30.72TB SSD and 48TB HD) 6x SSD and 12x, 14x, 16x or 18x HD (up to 46,08TB SSD and 43.2TB HD) 8x SSD and 16x HD (up to 61.44TB SSD and 38.4TB HD)
Boot device	1x SSD SATA 6G 240GB or 480GB M.2 N H-P 1x PDUAL CP200 and 2x SSD SATA 6G 240GB or 480GB M.2 N H-P
LAN Options	PLAN EP X710-DA2 2x10Gb SFP+ LP PLAN EP X710-DA4 4x10Gb SFP+ LP PLAN EP X550-T2 2x10GBASE-T LP PLAN EP MCX4-LX 25Gb 2p SFP28 LP
SAS Controller	PSAS CP403i/CP503i
Power Supplies	2x Modular PSU 800W platinum hp 2x Modular PSU 1200W platinum hp 2x Modular PSU DC -48V 800W Platinum hp

Server Model	XF8050 NVMe M2
Chassis	PRIMERGY RX2540 M5 2.5" Hybrid Flash
CPU Options	2x Intel Xeon Silver 4208 8C 2.10 GHz 2x Intel Xeon Silver 4210 10C 2.20 GHz 2x Intel Xeon Silver 4210R 10C 2.40 GHz 2x Intel Xeon Silver 4214 12C 2.20 GHz 2x Intel Xeon Silver 4214R 12C 2.40 GHz 2x Intel Xeon Silver 4215 8C 2.50 GHz 2x Intel Xeon Silver 4215R 8C 3.20 GHz 2x Intel Xeon Silver 4216 16C 2.10 GHz 2x Intel Xeon Silver 4214Y 8/10/12C 2.20 GHz 2x Intel Xeon Gold 5215 10C 2.50 GHz 2x Intel Xeon Gold 5217 8C 3.0GHz 2x Intel Xeon Gold 5218 16C 2.30 GHz 2x Intel Xeon Gold 5218B 16C 2.30 GHz 2x Intel Xeon Gold 5218R 20C 2.10 GHz 2x Intel Xeon Gold 5220 18C 2.20 GHz 2x Intel Xeon Gold 5220R 24C 2.20 GHz 2x Intel Xeon Gold 5220S 18C 2.60 GHz 2x Intel Xeon Gold 6226 12C 2.80 GHz 2x Intel Xeon Gold 6226R 16C 2.90 GHz 2x Intel Xeon Gold 6230 20C 2.10 GHz 2x Intel Xeon Gold 6230R 26C 2.10 GHz 2x Intel Xeon Gold 6234 8C 3.40 GHz 2x Intel Xeon Gold 6238 22C 2.10 GHz 2x Intel Xeon Gold 6238R 28C 2.20 GHz 2x Intel Xeon Gold 6240 18C 2.60 GHz 2x Intel Xeon Gold 6240R 24C 2.40 GHz 2x Intel Xeon Gold 6242 16C 2.80 GHz 2x Intel Xeon Gold 6242R 20C 3.10 GHz 2x Intel Xeon Gold 6244 8C 3.60 GHz 2x Intel Xeon Gold 6246 12C 3.30 GHz 2x Intel Xeon Gold 6246R 16C 3.40 GHz 2x Intel Xeon Gold 6248 20C 2.50 GHz 2x Intel Xeon Gold 6248R 24C 3.00 GHz 2x Intel Xeon Gold 6250 8C 3.90 GHz 2x Intel Xeon Gold 6252 24C 2.10 GHz 2x Intel Xeon Gold 6254 18C 3.10 GHz 2x Intel Xeon Gold 6256 12C 3.60 GHz 2x Intel Xeon Gold 6258R 28C 2.70 GHz 2x Intel Xeon Gold 6222V 20C 1.80 GHz 2x Intel Xeon Gold 6262V 24C 1.90 GHz 2x Intel Xeon Gold 5215L 10C 2.50 GHz 2x Intel Xeon Gold 6238L 22C 2.10 GHz 2x Intel Xeon Gold 6240L 18C 2.60 GHz 2x Intel Xeon Gold 6240Y 8/14/18C 2.60 GHz 2x Intel Xeon Platinum 8260 24C 2.40 GHz 2x Intel Xeon Platinum 8268 24C 2.90 GHz 2x Intel Xeon Platinum 8270 26C 2.70 GHz 2x Intel Xeon Platinum 8276 28C 2.30 GHz 2x Intel Xeon Platinum 8280 28C 2.70 GHz 2x Intel Xeon Platinum 8260L 24C 2.40 GHz 2x Intel Xeon Platinum 8276L 28C 2.30 GHz 2x Intel Xeon Platinum 8280L 28C 2.70 GHz 2x Intel Xeon Platinum 8260Y 16/20/24C 2.40 GHz
GPU Option	1x or 2x PY NVIDIA Tesla T4
Memory Options (no model mix)	8x, 12x, 16x or 24x 8GB (1x8GB) 1Rx4 DDR4-2933 R ECC (up to 192GB) 8x, 12x, 16x or 24x 16GB (1x16GB) 1Rx4 DDR4-2933 R ECC (up to 384GB) 8x, 12x, 16x or 24x 32GB (1x32GB) 2Rx4 DDR4-2933 R ECC (up to 768GB) 12x, 16x or 24x 64GB (1x64GB) 4Rx4 DDR4-2933 LR ECC (up to 1536GB) 12x, 16x or 24x 128GB (1x128GB) 4Rx4 DDR4-2933 LR ECC (up to 3072GB)
NVMe Options (no model mix)	SSD PCIe3 1.6TB Mixed-Use 2.5" H-P EP SSD PCIe3 3.2TB Mixed-Use 2.5" H-P EP
SSD Options (no model mix)	SSD SATA 6G 1.92TB Read-Int. 2.5" PM883 SSD SATA 6G 3.84TB Read-Int. 2.5" PM883 SSD SATA 6G 960GB Mixed-Use 2.5" H-P EP SSD SATA 6G 1.92TB Mixed-Use 2.5" H-P EP SSD SATA 6G 3.84TB Mixed-Use 2.5" H-P EP SSD SAS 12G 7.68TB Read-Int. 2.5" PM1643a
Disk Configs	4x NVMe (up to 12.8TB) and 8x SSD (up to 61.44TB)
Boot device	1x SSD SATA 6G 240GB or 480GB M.2 N H-P 1x PDUAL CP200 and 2x SSD SATA 6G 240GB or 480GB M.2 N H-P
LAN Options	PLAN EP X710-DA2 2x10Gb SFP+ LP PLAN EP X710-DA4 4x10Gb SFP+ LP PLAN EP X550-T2 2x10GBASE-T LP PLAN EP MCX4-LX 25Gb 2p SFP28 LP
SAS Controller	PSAS CP403i/CP503i
Power Supplies	2x Modular PSU 800W platinum hp 2x Modular PSU 1200W platinum hp 2x Modular PSU DC -48V 800W Platinum hp

Server Model	XF8055 M2
Chassis	PRIMERGY RX2540 M5 12x3.5"
CPU Options	<p>2x Intel Xeon Silver 4208 8C 2.10 GHz</p> <p>2x Intel Xeon Silver 4210 10C 2.20 GHz</p> <p>2x Intel Xeon Silver 4210R 10C 2.40 GHz</p> <p>2x Intel Xeon Silver 4214 12C 2.20 GHz</p> <p>2x Intel Xeon Silver 4214R 12C 2.40 GHz</p> <p>2x Intel Xeon Silver 4215 8C 2.50 GHz</p> <p>2x Intel Xeon Silver 4215R 8C 3.20 GHz</p> <p>2x Intel Xeon Silver 4216 16C 2.10 GHz</p> <p>2x Intel Xeon Silver 4214Y 8/10/12C 2.20 GHz</p> <p>2x Intel Xeon Gold 5215 10C 2.50 GHz</p> <p>2x Intel Xeon Gold 5217 8C 3.0GHz</p> <p>2x Intel Xeon Gold 5218 16C 2.30 GHz</p> <p>2x Intel Xeon Gold 5218B 16C 2.30 GHz</p> <p>2x Intel Xeon Gold 5218R 20C 2.10 GHz</p> <p>2x Intel Xeon Gold 5220 18C 2.20 GHz</p> <p>2x Intel Xeon Gold 5220R 24C 2.20 GHz</p> <p>2x Intel Xeon Gold 5220S 18C 2.60 GHz</p> <p>2x Intel Xeon Gold 6226 12C 2.80 GHz</p> <p>2x Intel Xeon Gold 6226R 16C 2.90 GHz</p> <p>2x Intel Xeon Gold 6230 20C 2.10 GHz</p> <p>2x Intel Xeon Gold 6230R 26C 2.10 GHz</p> <p>2x Intel Xeon Gold 6234 8C 3.40 GHz</p> <p>2x Intel Xeon Gold 6238 22C 2.10 GHz</p> <p>2x Intel Xeon Gold 6238R 28C 2.20 GHz</p> <p>2x Intel Xeon Gold 6240 18C 2.60 GHz</p> <p>2x Intel Xeon Gold 6240R 24C 2.40 GHz</p> <p>2x Intel Xeon Gold 6242 16C 2.80 GHz</p> <p>2x Intel Xeon Gold 6242R 20C 3.10 GHz</p> <p>2x Intel Xeon Gold 6244 8C 3.60 GHz</p> <p>2x Intel Xeon Gold 6246 12C 3.30 GHz</p> <p>2x Intel Xeon Gold 6246R 16C 3.40 GHz</p> <p>2x Intel Xeon Gold 6248 20C 2.50 GHz</p> <p>2x Intel Xeon Gold 6248R 24C 3.00 GHz</p> <p>2x Intel Xeon Gold 6250 8C 3.90 GHz</p> <p>2x Intel Xeon Gold 6252 24C 2.10 GHz</p> <p>2x Intel Xeon Gold 6254 18C 3.10 GHz</p> <p>2x Intel Xeon Gold 6256 12C 3.60 GHz</p> <p>2x Intel Xeon Gold 6258R 28C 2.70 GHz</p> <p>2x Intel Xeon Gold 6222V 20C 1.80 GHz</p> <p>2x Intel Xeon Gold 6262V 24C 1.90 GHz</p> <p>2x Intel Xeon Gold 5215L 10C 2.50 GHz</p> <p>2x Intel Xeon Gold 6238L 22C 2.10 GHz</p> <p>2x Intel Xeon Gold 6240L 18C 2.60 GHz</p> <p>2x Intel Xeon Gold 6240Y 8/14/18C 2.60 GHz</p> <p>2x Intel Xeon Platinum 8260 24C 2.40 GHz</p> <p>2x Intel Xeon Platinum 8268 24C 2.90 GHz</p> <p>2x Intel Xeon Platinum 8270 26C 2.70 GHz</p> <p>2x Intel Xeon Platinum 8276 28C 2.30 GHz</p> <p>2x Intel Xeon Platinum 8280 28C 2.70 GHz</p> <p>2x Intel Xeon Platinum 8260L 24C 2.40 GHz</p> <p>2x Intel Xeon Platinum 8276L 28C 2.30 GHz</p> <p>2x Intel Xeon Platinum 8280L 28C 2.70 GHz</p> <p>2x Intel Xeon Platinum 8260Y 16/20/24C 2.40 GHz</p>
GPU Option	1x or 2x PY NVIDIA Tesla T4
Memory Options (no model mix)	<p>8x, 12x, 16x or 24x 8GB (1x8GB) 1Rx4 DDR4-2933 R ECC (up to 192GB)</p> <p>8x, 12x, 16x or 24x 16GB (1x16GB) 1Rx4 DDR4-2933 R ECC (up to 384GB)</p> <p>8x, 12x, 16x or 24x 32GB (1x32GB) 2Rx4 DDR4-2933 R ECC (up to 768GB)</p> <p>12x, 16x or 24x 64GB (1x64GB) 4Rx4 DDR4-2933 LR ECC (up to 1536GB)</p> <p>12x, 16x or 24x 128GB (1x128GB) 4Rx4 DDR4-2933 LR ECC (up to 3072GB)</p>
SSD Options (no model mix)	<p>SSD SATA 6G 1.92TB Read-Int. 3.5" PM883</p> <p>SSD SATA 6G 3.84TB Read-Int. 3.5" PM883</p> <p>SSD SATA 6G 960GB Mixed-Use 3.5" H-P EP</p> <p>SSD SATA 6G 1.92TB Mixed-Use 3.5" H-P EP</p> <p>SSD SATA 6G 3.84TB Mixed-Use 3.5" H-P EP</p> <p>SSD SAS 12G 7.68TB Read-Int. 2.5" PM1643a</p>
HDD Options (no model mix)	<p>HD SAS 12G 2TB/4TB/6TB/8TB/12TB 7.2K HOT PL 3.5" BC</p> <p>HD SAS 12G 14/16TB 7.2K 512e HOT PL 3.5" BC (Files/Objects dedicated clusters only)</p>
All Flash Disk Configs	4x, 6x, 8x, 10x or 12x SSD (up to 92.16TB)
Hybrid Disk Configs	<p>2x SSD and 4x, 6x, 8x or 10x HD (up to 15.36TB SSD and 160TB HD)</p> <p>4x SSD and 8x HD (up to 30.72TB SSD and 128TB HD)</p>
Boot device	<p>1x SSD SATA 6G 240GB or 480GB M.2 N H-P</p> <p>1x PDUAL CP200 and 2x SSD SATA 6G 240GB or 480GB M.2 N H-P</p>
LAN Options	<p>PLAN EP X710-DA2 2x10Gb SFP+ LP</p> <p>PLAN EP X710-DA4 4x10Gb SFP+ LP</p> <p>PLAN EP X550-T2 2x10GBASE-T LP</p> <p>PLAN EP MCX4-LX 25Gb 2p SFP28 LP</p>
SAS Controller	PSAS CP403i/CP503i
Power Supplies	<p>2x Modular PSU 800W platinum hp</p> <p>2x Modular PSU 1200W platinum hp</p> <p>2x Modular PSU DC -48V 800W Platinum hp</p>

Server Model	XF8055 VDI M2
Chassis	PRIMERGY RX2540 M5 4x3.5" GFX/GPU (+Upgrade kit from 4x to 8x 3.5")
CPU Options	2x Intel Xeon Silver 4208 8C 2.10 GHz 2x Intel Xeon Silver 4210 10C 2.20 GHz 2x Intel Xeon Silver 4210R 10C 2.40 GHz 2x Intel Xeon Silver 4214 12C 2.20 GHz 2x Intel Xeon Silver 4214R 12C 2.40 GHz 2x Intel Xeon Silver 4215 8C 2.50 GHz 2x Intel Xeon Silver 4215R 8C 3.20 GHz 2x Intel Xeon Silver 4216 16C 2.10 GHz 2x Intel Xeon Silver 4214Y 8/10/12C 2.20 GHz 2x Intel Xeon Gold 5215 10C 2.50 GHz 2x Intel Xeon Gold 5217 8C 3.0GHz 2x Intel Xeon Gold 5218 16C 2.30 GHz 2x Intel Xeon Gold 5218B 16C 2.30 GHz 2x Intel Xeon Gold 5218R 20C 2.10 GHz 2x Intel Xeon Gold 5220 18C 2.20 GHz 2x Intel Xeon Gold 5220R 24C 2.20 GHz 2x Intel Xeon Gold 5220S 18C 2.60 GHz 2x Intel Xeon Gold 6226 12C 2.80 GHz 2x Intel Xeon Gold 6226R 16C 2.90 GHz 2x Intel Xeon Gold 6230 20C 2.10 GHz 2x Intel Xeon Gold 6230R 26C 2.10 GHz 2x Intel Xeon Gold 6234 8C 3.40 GHz 2x Intel Xeon Gold 6238 22C 2.10 GHz 2x Intel Xeon Gold 6238R 28C 2.20 GHz 2x Intel Xeon Gold 6240 18C 2.60 GHz 2x Intel Xeon Gold 6240R 24C 2.40 GHz 2x Intel Xeon Gold 6242 16C 2.80 GHz 2x Intel Xeon Gold 6244 8C 3.60 GHz 2x Intel Xeon Gold 6246 12C 3.30 GHz 2x Intel Xeon Gold 6248 20C 2.50 GHz 2x Intel Xeon Gold 6252 24C 2.10 GHz 2x Intel Xeon Gold 6222V 20C 1.80 GHz 2x Intel Xeon Gold 6262V 24C 1.90 GHz 2x Intel Xeon Gold 5215L 10C 2.50 GHz 2x Intel Xeon Gold 6238L 22C 2.10 GHz 2x Intel Xeon Gold 6240L 18C 2.60 GHz 2x Intel Xeon Gold 6240Y 8/14/18C 2.60 GHz 2x Intel Xeon Platinum 8260 24C 2.40 GHz 2x Intel Xeon Platinum 8276 28C 2.30 GHz 2x Intel Xeon Platinum 8260L 24C 2.40 GHz 2x Intel Xeon Platinum 8276L 28C 2.30 GHz 2x Intel Xeon Platinum 8260Y 16/20/24C 2.40 GHz
GPU Options (no model mix)	1x or 2x PGRA CP NVIDIA Tesla M10 1x or 2x PGRA CP NVIDIA Quadro RTX6000/RTX8000 1x or 2x PY NVIDIA Tesla V100S 32GB for PCIe-based
Memory Options (no model mix)	8x, 12x, 16x or 24x 8GB (1x8GB) 1Rx4 DDR4-2933 R ECC (up to 192GB) 8x, 12x, 16x or 24x 16GB (1x16GB) 1Rx4 DDR4-2933 R ECC (up to 384GB) 8x, 12x, 16x or 24x 32GB (1x32GB) 2Rx4 DDR4-2933 R ECC (up to 768GB) 12x, 16x or 24x 64GB (1x64GB) 4Rx4 DDR4-2933 LR ECC (up to 1536GB) 12x, 16x or 24x 128GB (1x128GB) 4Rx4 DDR4-2933 LR ECC (up to 3072GB)
SSD Options (no model mix)	SSD SATA 6G 1.92TB Read-Int. 3.5" PM883 SSD SATA 6G 3.84TB Read-Int. 3.5" PM883 SSD SATA 6G 960GB Mixed-Use 3.5" H-P EP SSD SATA 6G 1.92TB Mixed-Use 3.5" H-P EP SSD SATA 6G 3.84TB Mixed-Use 3.5" H-P EP SSD SAS 12G 7.68TB Read-Int. 2.5" PM1643a
HDD Options (no model mix)	HD SAS 12G 2TB/4TB/6TB/8TB/12/14/16TB 7.2K HOT PL 3.5" BC
All Flash Disk Configs	2x, 4x, 6x or 8x SSD (up to 61.44TB)
Hybrid Disk Configs	2x SSD and 4x or 6x HD (up to 15.36TB SSD and 96TB HD)
Boot device	1x SSD SATA 6G 240GB or 480GB M.2 N H-P 1x PDUAL CP200 and 2x SSD SATA 6G 240GB or 480GB M.2 N H-P
LAN Options	PLAN EP X710-DA2 2x10Gb SFP+ LP PLAN EP X710-DA4 4x10Gb SFP+ LP PLAN EP X550-T2 2x10GBASE-T LP PLAN EP MCX4-LX 25Gb 2p SFP28 LP
SAS Controller	PSAS CP403i/CP503i
Power Supplies	2x Modular PSU 800W platinum hp 2x Modular PSU 1200W platinum hp 2x Modular PSU DC -48V 800W Platinum hp

Server Model	XF8055 VDI LP M2
Chassis	PRIMERGY RX2540 M5 4x3.5" (+Upgrade kit from 4x to 8x 3.5")
CPU Options	2x Intel Xeon Silver 4208 8C 2.10 GHz 2x Intel Xeon Silver 4210 10C 2.20 GHz 2x Intel Xeon Silver 4210R 10C 2.40 GHz 2x Intel Xeon Silver 4214 12C 2.20 GHz 2x Intel Xeon Silver 4214R 12C 2.40 GHz 2x Intel Xeon Silver 4215 8C 2.50 GHz 2x Intel Xeon Silver 4215R 8C 3.20 GHz 2x Intel Xeon Silver 4216 16C 2.10 GHz 2x Intel Xeon Silver 4214Y 8/10/12C 2.20 GHz 2x Intel Xeon Gold 5215 10C 2.50 GHz 2x Intel Xeon Gold 5217 8C 3.0GHz 2x Intel Xeon Gold 5218 16C 2.30 GHz 2x Intel Xeon Gold 5218B 16C 2.30 GHz 2x Intel Xeon Gold 5218R 20C 2.10 GHz 2x Intel Xeon Gold 5220 18C 2.20 GHz 2x Intel Xeon Gold 5220R 24C 2.20 GHz 2x Intel Xeon Gold 5220S 18C 2.60 GHz 2x Intel Xeon Gold 6226 12C 2.80 GHz 2x Intel Xeon Gold 6226R 16C 2.90 GHz 2x Intel Xeon Gold 6230 20C 2.10 GHz 2x Intel Xeon Gold 6230R 26C 2.10 GHz 2x Intel Xeon Gold 6234 8C 3.40 GHz 2x Intel Xeon Gold 6238 22C 2.10 GHz 2x Intel Xeon Gold 6238R 28C 2.20 GHz 2x Intel Xeon Gold 6240 18C 2.60 GHz 2x Intel Xeon Gold 6240R 24C 2.40 GHz 2x Intel Xeon Gold 6242 16C 2.80 GHz 2x Intel Xeon Gold 6244 8C 3.60 GHz 2x Intel Xeon Gold 6246 12C 3.30 GHz 2x Intel Xeon Gold 6248 20C 2.50 GHz 2x Intel Xeon Gold 6252 24C 2.10 GHz 2x Intel Xeon Gold 6222V 20C 1.80 GHz 2x Intel Xeon Gold 6262V 24C 1.90 GHz 2x Intel Xeon Gold 5215L 10C 2.50 GHz 2x Intel Xeon Gold 6238L 22C 2.10 GHz 2x Intel Xeon Gold 6240L 18C 2.60 GHz 2x Intel Xeon Gold 6240Y 8/14/18C 2.60 GHz 2x Intel Xeon Platinum 8260 24C 2.40 GHz 2x Intel Xeon Platinum 8276 28C 2.30 GHz 2x Intel Xeon Platinum 8260L 24C 2.40 GHz 2x Intel Xeon Platinum 8276L 28C 2.30 GHz 2x Intel Xeon Platinum 8260Y 16/20/24C 2.40 GHz
GPU Options	1x, 2x, 3x or 4x PY NVIDIA Tesla T4
Memory Options (no model mix)	8x, 12x, 16x or 24x 8GB (1x8GB) 1Rx4 DDR4-2933 R ECC (up to 192GB) 8x, 12x, 16x or 24x 16GB (1x16GB) 1Rx4 DDR4-2933 R ECC (up to 384GB) 8x, 12x, 16x or 24x 32GB (1x32GB) 2Rx4 DDR4-2933 R ECC (up to 768GB) 12x, 16x or 24x 64GB (1x64GB) 4Rx4 DDR4-2933 LR ECC (up to 1536GB) 12x, 16x or 24x 128GB (1x128GB) 4Rx4 DDR4-2933 LR ECC (up to 3072GB)
SSD Options (no model mix)	SSD SATA 6G 1.92TB Read-Int. 3.5" PM883 SSD SATA 6G 3.84TB Read-Int. 3.5" PM883 SSD SATA 6G 960GB Mixed-Use 3.5" H-P EP SSD SATA 6G 1.92TB Mixed-Use 3.5" H-P EP SSD SATA 6G 3.84TB Mixed-Use 3.5" H-P EP SSD SAS 12G 7.68TB Read-Int. 2.5" PM1643a
HDD Options (no model mix)	HD SAS 12G 2TB/4TB/6TB/8TB/12/14/16TB 7.2K HOT PL 3.5" BC
All Flash Disk Configs	2x, 4x, 6x or 8x SSD (up to 61.44TB)
Hybrid Disk Configs	2x SSD and 4x or 6x HD (up to 15.36TB SSD and 96TB HD)
Boot device	1x SSD SATA 6G 240GB or 480GB M.2 N H-P 1x PDUAL CP200 and 2x SSD SATA 6G 240GB or 480GB M.2 N H-P
LAN Options	PLAN EP X710-DA2 2x10Gb SFP+ LP PLAN EP X710-DA4 4x10Gb SFP+ LP PLAN EP X550-T2 2x10GBASE-T LP PLAN EP MCX4-LX 25Gb 2p SFP28 LP
SAS Controller	PSAS CP403i/CP503i
Power Supplies	2x Modular PSU 800W platinum hp 2x Modular PSU 1200W platinum hp 2x Modular PSU DC -48V 800W Platinum hp

Server Model	XF9050 M2
Chassis	PRIMERGY RX4770 M5
CPU Options	2x or 4x Intel Xeon Gold 5215 10C 2.50 GHz 2x or 4x Intel Xeon Gold 5217 8C 3.0GHz 2x or 4x Intel Xeon Gold 5218 16C 2.30 GHz 2x or 4x Intel Xeon Gold 5218B 16C 2.30 GHz 2x or 4x Intel Xeon Gold 5220 18C 2.20 GHz 2x or 4x Intel Xeon Gold 5220S 18C 2.60 GHz 2x or 4x Intel Xeon Gold 6226 12C 2.80 GHz 2x or 4x Intel Xeon Gold 6230 20C 2.10 GHz 2x or 4x Intel Xeon Gold 6234 8C 3.40 GHz 2x or 4x Intel Xeon Gold 6238 22C 2.10 GHz 2x or 4x Intel Xeon Gold 6240 18C 2.60 GHz 2x or 4x Intel Xeon Gold 6242 16C 2.80 GHz 2x or 4x Intel Xeon Gold 6244 8C 3.60 GHz 2x or 4x Intel Xeon Gold 6246 12C 3.30 GHz 2x or 4x Intel Xeon Gold 6248 20C 2.50 GHz 2x or 4x Intel Xeon Gold 6252 24C 2.10 GHz 2x or 4x Intel Xeon Gold 6222V 20C 1.80 GHz 2x or 4x Intel Xeon Gold 6262V 24C 1.90 GHz 2x or 4x Intel Xeon Gold 5215L 10C 2.50 GHz 2x or 4x Intel Xeon Gold 6238L 22C 2.10 GHz 2x or 4x Intel Xeon Gold 6240L 18C 2.60 GHz 2x or 4x Intel Xeon Gold 6240Y 8/14/18C 2.60 GHz
Memory Options (no model mix)	24x or 48x 16GB (1x16GB) 1Rx4 DDR4-2933 R ECC (768GB) 24x or 48x 32GB (1x32GB) 2Rx4 DDR4-2933 R ECC (up to 1536GB) 24x or 48x 64GB (1x64GB) 4Rx4 DDR4-2933 LR ECC (up to 3072B) 24x or 48x 128GB (1x128GB) 4Rx4 DDR4-2933 LR ECC (up to 6144GB)
SSD Options (no model mix)	SSD SATA 6G 1.92TB Mixed-Use 2.5" H-P EP SSD SATA 6G 3.84TB Mixed-Use 2.5" H-P EP
All Flash Disk Configs	4x, 6x, 8x, 10x, 12x, 14x or 16x SSD (up to 122.88TB)
Boot device	1x SSD SATA 6G 240GB or 480GB M.2 N H-P 1x PDUAL CP200 and 2x SSD SATA 6G 240GB or 480GB M.2 N H-P
LAN Options	PLAN EP X710-DA2 2x10Gb SFP+ LP/FH PLAN EP X710-DA4 4x10Gb SFP+ LP/FH PLAN EP X550-T2 2x10GBASE-T LP/FH PLAN EP MCX4-LX 25Gb 2p SFP28 LP/FH
SAS Controller	PSAS CP403i
Power Supplies	2x Modular PSU 1600W platinum hp

Software

Acropolis	The Acropolis software pack is pre-installed on the aforementioned hardware and available in several editions to meet your infrastructure needs with the right capabilities.
Starter	Core set of software functionality. Ideal for Small-scale deployments with a limited set of workloads.
Professional	Rich data services, resilience and management features. Ideal for running multiple applications or large-scale single workload deployments.
Ultimate	The full suite of Nutanix software capabilities to tackle complex infrastructure challenges. Ideal for multi-site deployments and advanced security requirements.
	Further information and the individual features of the Acropolis software editions can be found on the website https://www.nutanix.com/products/software-options/
Nutanix Add-Ons	Licenses for additional Nutanix software features.
Prism Pro	Nutanix Prism Pro improves the quality and efficiency in IT operations for the modern datacenter. Powered by the machine learning and task automation, Prism Pro intelligently optimizes capacity, proactively detects performance anomalies, and enables the IT team to automate operations tasks with ease and confidence.
Prism Ultimate	Nutanix Prism Ultimate adds application discovery and monitoring, budgeting/chargeback and cost metering for resources, and a SQL Server monitoring content pack.
Files	Nutanix Files is a software-defined scale-out file storage solution designed to address a wide range of use cases, including Linux support and Windows home directories, user profiles and department shares.
Objects	Nutanix Objects is a software-defined object storage solution. It's designed with an S3-compatible REST API interface to handle terabytes to petabytes of unstructured data, all from a single namespace.
Flow	Nutanix Flow delivers advanced network security, providing visibility into the virtual network, application-centric protection from network threats, malware, and ransomware and security and compliance monitoring.
Calm	Nutanix Calm is a multi-cloud application management framework. Calm provides application automation and lifecycle management natively integrated into the Nutanix Platform.
Mine with Veeam	For system admins responsible for uptime and recovery SLAs of mission critical applications and data Nutanix Mine with Veeam deploys Veeam Cloud Data Management integrated with Nutanix storage management for a solution that reduces the time and complexity of data protection across the data center and the cloud.

More information

Fujitsu products & solutions

Products

www.fujitsu.com/global/products/
Fujitsu offers a full portfolio of other computing products.

Computing products

- Storage systems: ETERNUS
- Server: PRIMERGY, PRIMEQUEST, Fujitsu SPARC M10, BS2000/OSD Mainframe
- Client Computing Devices: LIFEBOOK, STYLISTIC, ESPRIMO, FUTRO, CELSIUS
- Peripherals: Fujitsu Displays, Accessories
- Software
- Network

Product Support Services with different service levels agreements are recommended to safeguard each product and ensure smooth IT operation.

Solutions

<http://www.fujitsu.com/global/solutions>
The Fujitsu solutions combine reliable Fujitsu products with the best in services, know-how and worldwide partnerships. Fujitsu's Solutions include parts of one or more activity groups (e.g., planning, implementation, support, management, and training services) and are designed to solve a specific business need.

Infrastructure Solutions are customer offerings created by bringing Fujitsu's best products, services and technologies together with those from partners to deliver benefit to our customers' businesses.

Industry Solutions are tailored to meet the needs of specific verticals.

Business and Technology Solutions provide a variety of technologies developed to tackle specific business issues such as security and sustainability, across many verticals.

Fujitsu services

Services

www.fujitsu.com/global/services/
Several customizable Fujitsu Service offerings ensure that IT makes a real difference and delivers true business value. We do this by leveraging our extensive experience in managing large, complex, transformational IT programs to help clients in planning, delivering and operating IT services in a challenging and changing business environment.

Application Services support the development, integration, testing, deployment and on-going management of both custom developed and packaged applications. The services focus on delivering business and productivity improvements for organizations.

Business Services respond to the challenge of planning, delivering and operating IT in a complex and changing IT environment.

Managed Infrastructure Services enable customers to deliver the optimal IT environment to meet their needs – achieving high levels of IT service quality and performance for data center and end user environments.

Fujitsu green policy innovation

www.fujitsu.com/global/about/environment/
Fujitsu Green Policy Innovation is our worldwide project for reducing burdens on the environment. Using our global know-how, we aim to resolve issues of environmental energy efficiency through IT. Please find further information at:



More information

To learn more about Fujitsu, please contact your Fujitsu sales representative, Fujitsu business partner, or visit our website. www.fujitsu.com/fts

Copyright

© 2020 Fujitsu Technology Solutions
Fujitsu, the Fujitsu logo and other Fujitsu trademarks are trademarks or registered trademarks of Fujitsu Limited in Japan and other countries. Other company, product and service names may be trademarks or registered trademarks of their respective owners.

Disclaimer

Technical data subject to modification and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

Contact

FUJITSU Technology Solutions GmbH
Address: Mies-van-der-Rohe-Str. 8, 80807 Munich, Germany
Website: www.fujitsu.com/fts
2021-08-25 WW EN